

Flujos de trabajo con Git:
usa Git de una forma eficiente



jesus@jesusamieiro.com



Flujo de trabajo

- Convenciones (Pautas de trabajo)
- Buenas prácticas

Ventajas

- Consistencia en el trabajo del equipo
- Mayor
 - productividad
 - calidad en el código → Code reviews
 - n.º de ciclos de publicación
- Mantenibilidad → ↑ organización del trabajo
- Onboarding más sencillo
- Integración con CI/CD

¿Qué buscamos?

- ¿Escala? → Tamaño del equipo
- ¿Es sencillo de aprender su uso?
- ¿Impone mucha carga extra?
- ¿Vamos a ser más ágiles?
- ¿Permite realizar code reviews?
- ¿Permite integrarse con sistemas CI/CD?

Tipos de flujo de trabajo

- Centralizado
- Ramas de funcionalidades
- Gitflow
- Forks

Centralizado


Características y operativa

- Funcionamiento «similar» a SVN u otros SCM centralizados
- 1 servidor principal
- Uso solo de 1 rama
- Commit local y push

Repositorio





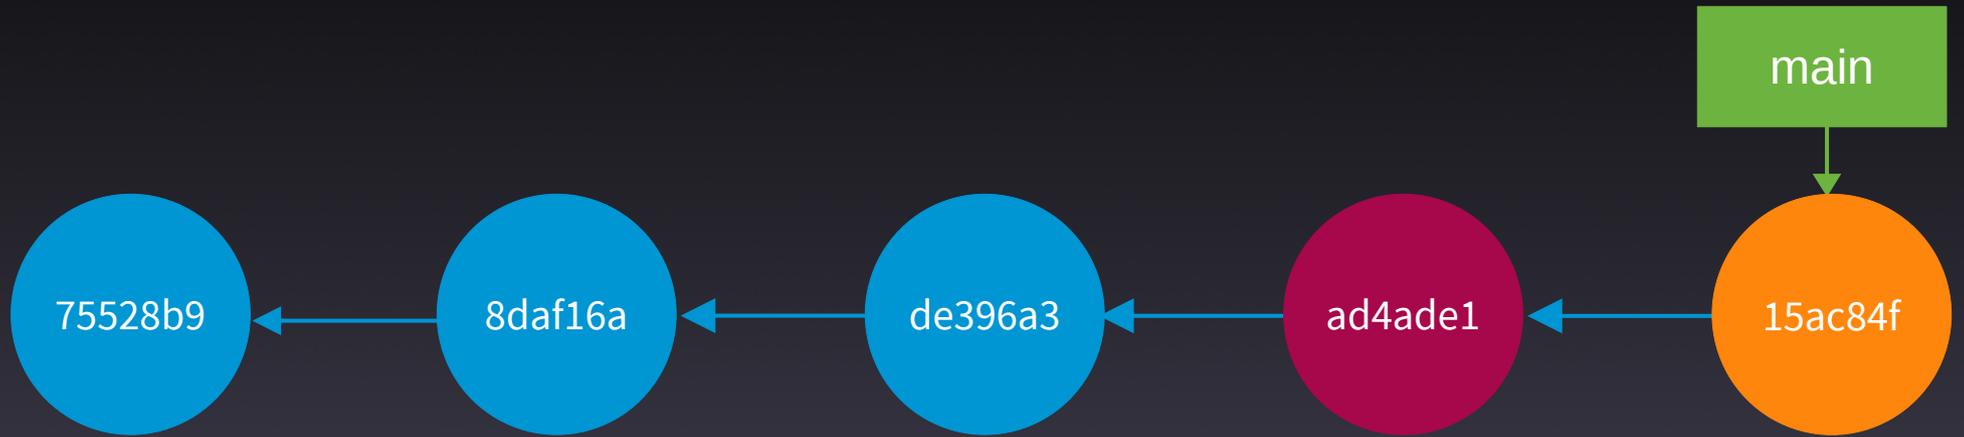

Centralizado

```
cd /var/tmp
```

```
mkdir -p /var/tmp/server
```

```
mkdir -p /var/tmp/user1
```

```
mkdir -p /var/tmp/user2
```


```
git init --bare /var/tmp/server/repo1.git
```

Centralizado (II)

```
# Usuario 1
cd /var/tmp/user1/
git clone /var/tmp/server/repo1.git
cd repo1
git config user.name "Noa"
git config user.email noa@example.com
echo "Línea 1 archivo 1" > archivo1.txt
git status
```

Centralizado (III)


```
# Usuario 1
git add .
git commit -m "Añado la línea 1 al archivo1.txt"
echo "Línea 2 archivo 1" >> archivo1.txt
git add .
git commit -m "Añado la línea 2 al archivo1.txt"
```

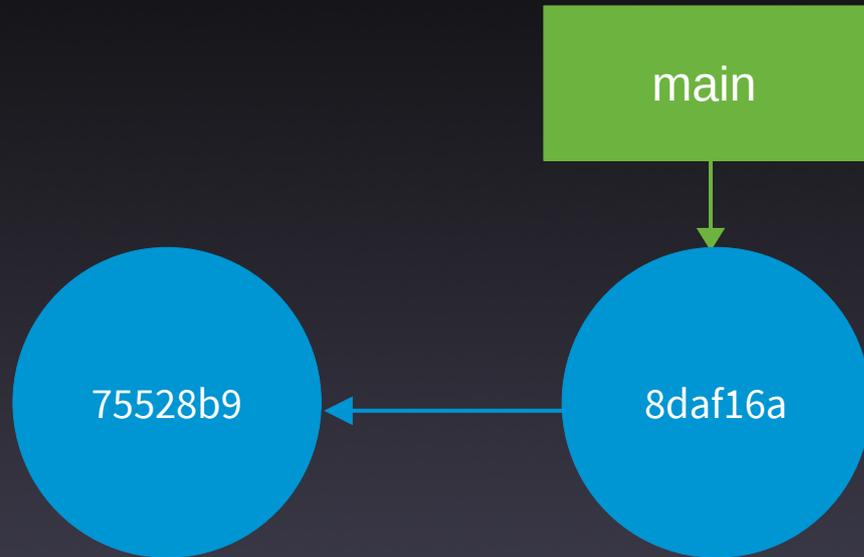

Centralizado (IV)


```
# Usuario 1
```

```
git push origin main
```

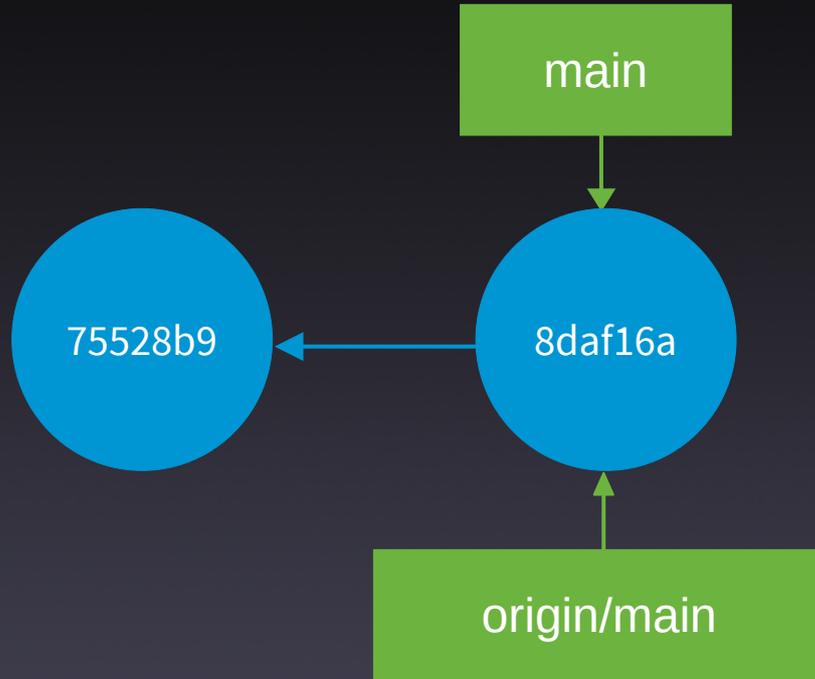

Centralizado (V)

```
# Usuario 1  
echo "Línea 3 archivo 1" >> archivo1.txt  
git add .  
git commit -m "Añado la línea 3 al archivo1.txt"
```

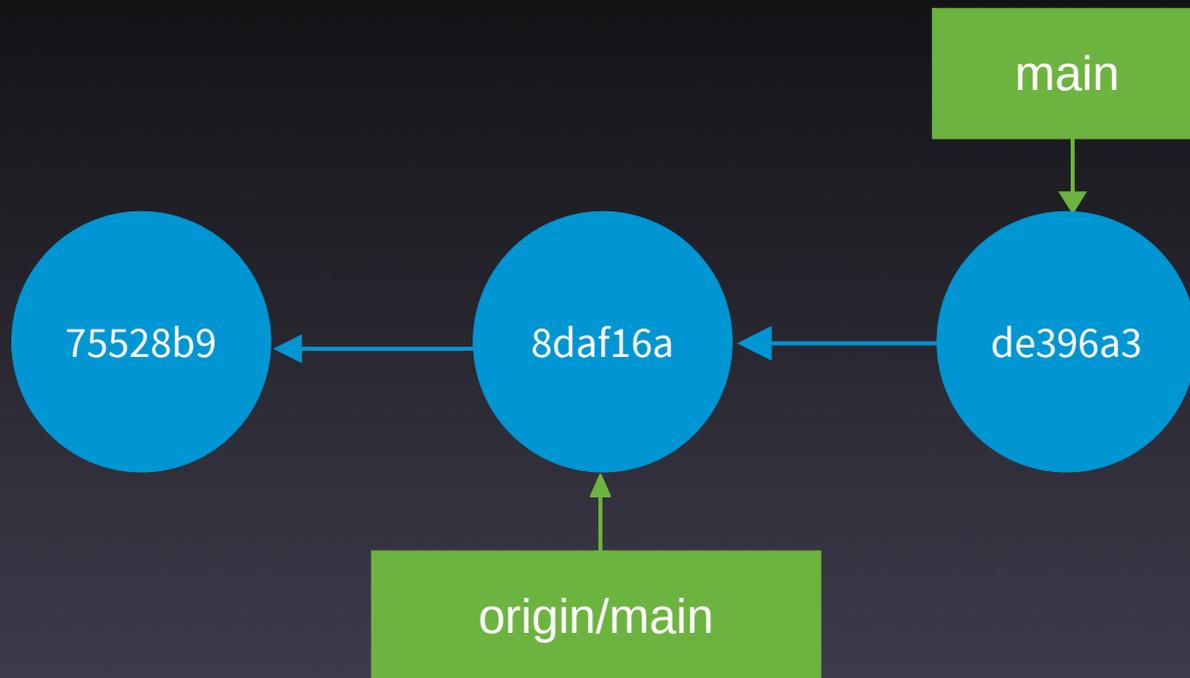

Centralizado (VI)

```
# Usuario 2
```


```
cd /var/tmp/user2/
```

```
git clone /var/tmp/server/repo1.git
```

```
cd repo1
```


```
git config user.name "Ada"
```

```
git config user.email ada@example.com
```

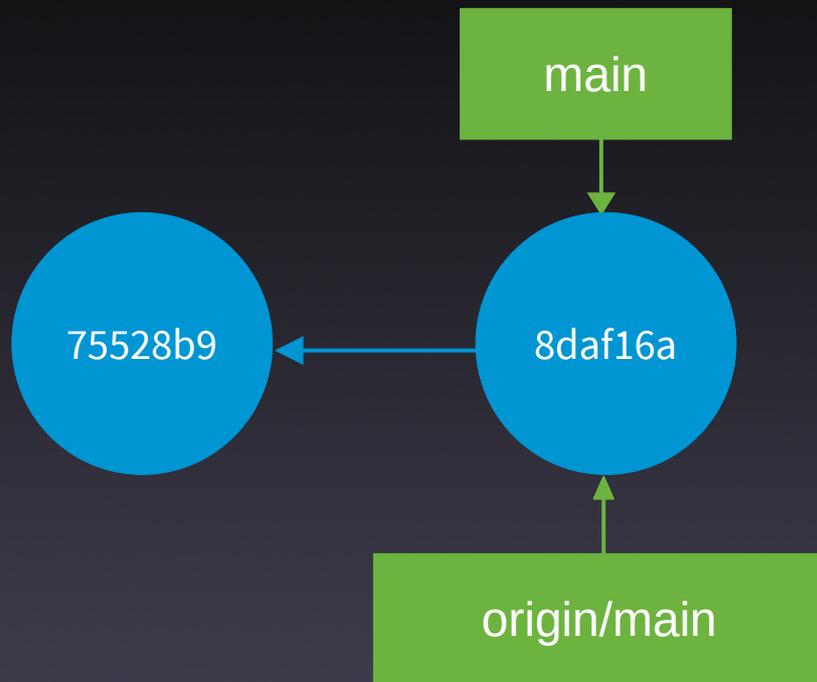

Centralizado (VII)


```
# Usuario 2  
echo "Línea 1 archivo 2" > archivo2.txt  
git status  
git add .  
git commit -m "Añado la línea 1 al archivo2.txt"
```

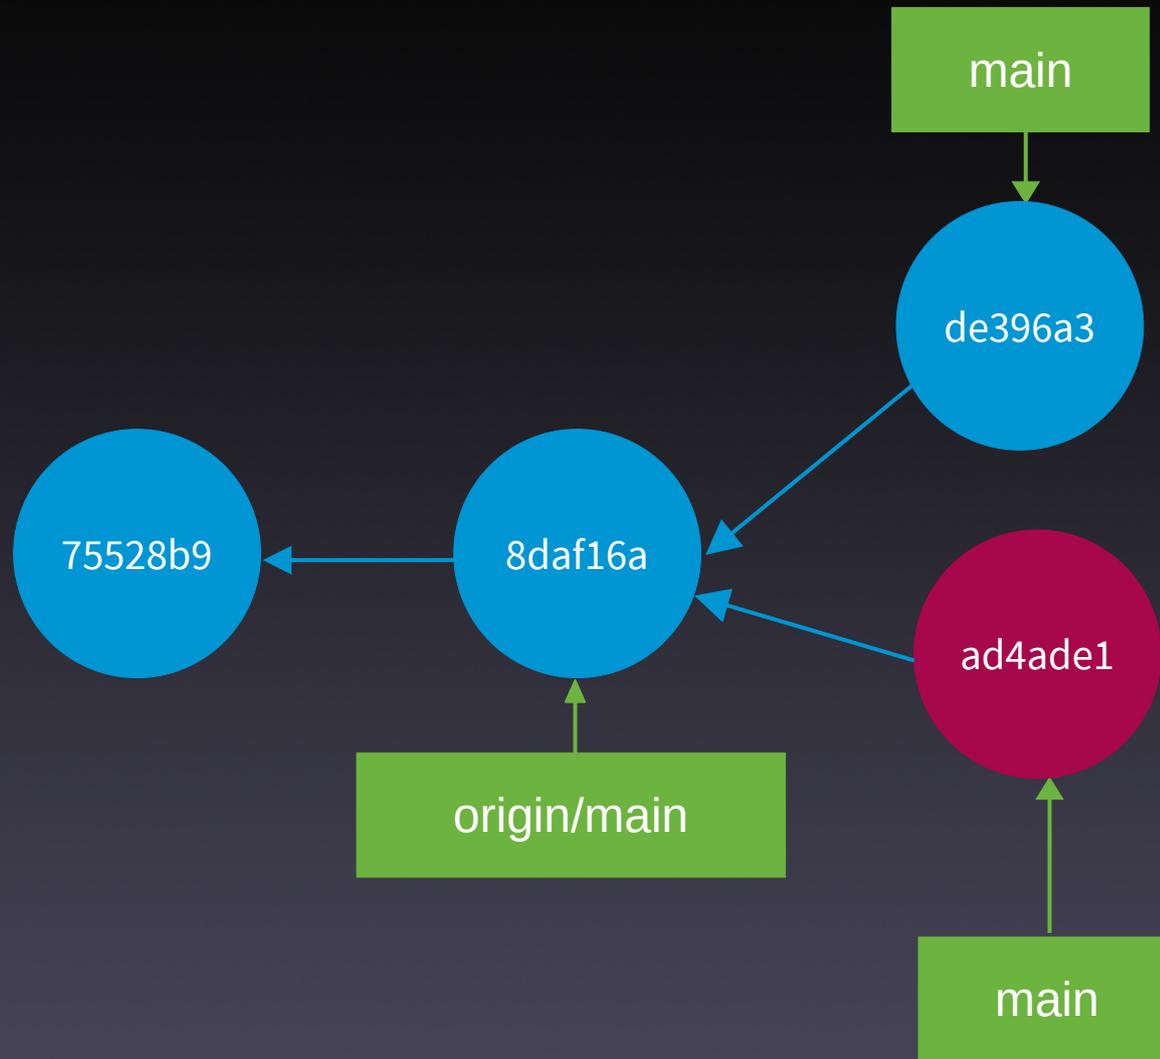

Centralizado (VIII)

```
# Usuario 2
```

```
git push origin main
```

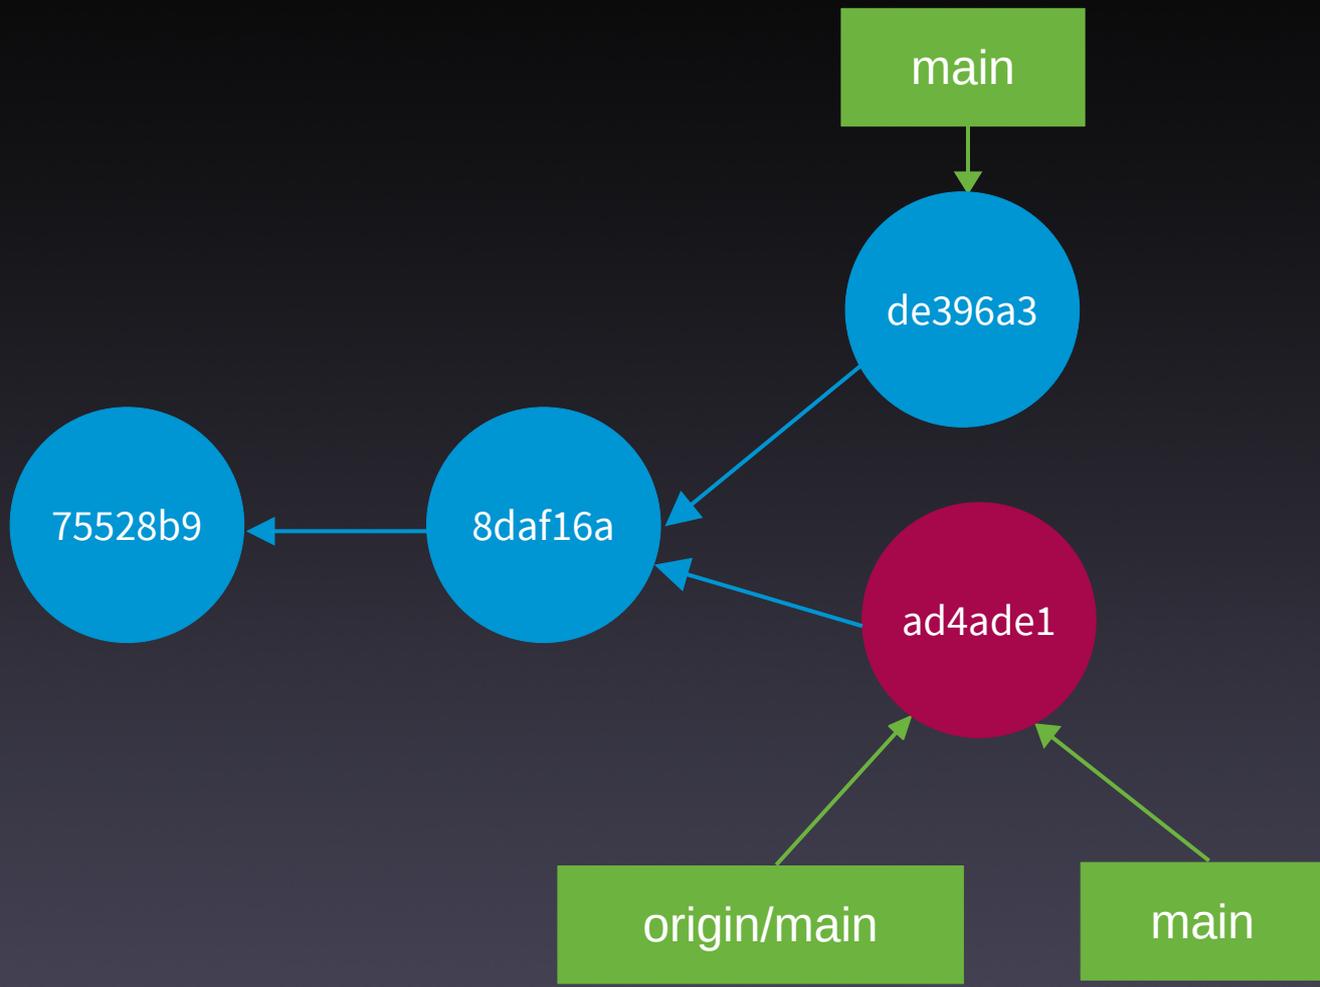

Centralizado (IX)

```
# Usuario 1
```

```
cd /var/tmp/user1/repo1/
```

```
git push origin main
```

```
To /var/tmp/server/repo1.git
```

```
! [rejected]          main -> main (fetch first)
```

```
error: failed to push some refs to '/var/tmp/server/repo1.git'
```

```
hint: Updates were rejected because the remote contains work that you do  
hint: not have locally. This is usually caused by another repository pushing  
hint: to the same ref. You may want to first integrate the remote changes  
hint: (e.g., 'git pull ...') before pushing again.  
hint: See the 'Note about fast-forwards' in 'git push --help' for details.
```

Centralizado (X)

```
# Usuario 1
```

```
git pull origin main
```

```
From /var/tmp/server/repo1
```

```
* branch          main          -> FETCH_HEAD
```

```
hint: You have divergent branches and need to specify how to reconcile them.
```

```
hint: You can do so by running one of the following commands sometime before
```

```
hint: your next pull:
```

```
hint:
```

```
hint:   git config pull.rebase false  # merge
```

```
hint:   git config pull.rebase true   # rebase
```

```
hint:   git config pull.ff only       # fast-forward only
```

```
hint:
```

```
hint: You can replace "git config" with "git config --global" to set a default
```

```
hint: preference for all repositories. You can also pass --rebase, --no-rebase,
```

```
hint: or --ff-only on the command line to override the configured default per
```

```
hint: invocation.
```

```
fatal: Need to specify how to reconcile divergent branches.
```


Centralizado (XI)

```
# Usuario 1
```

```
git config pull.ff only
```

```
git pull origin main # Error
```

```
git pull --no-ff # Commit de fusión
```

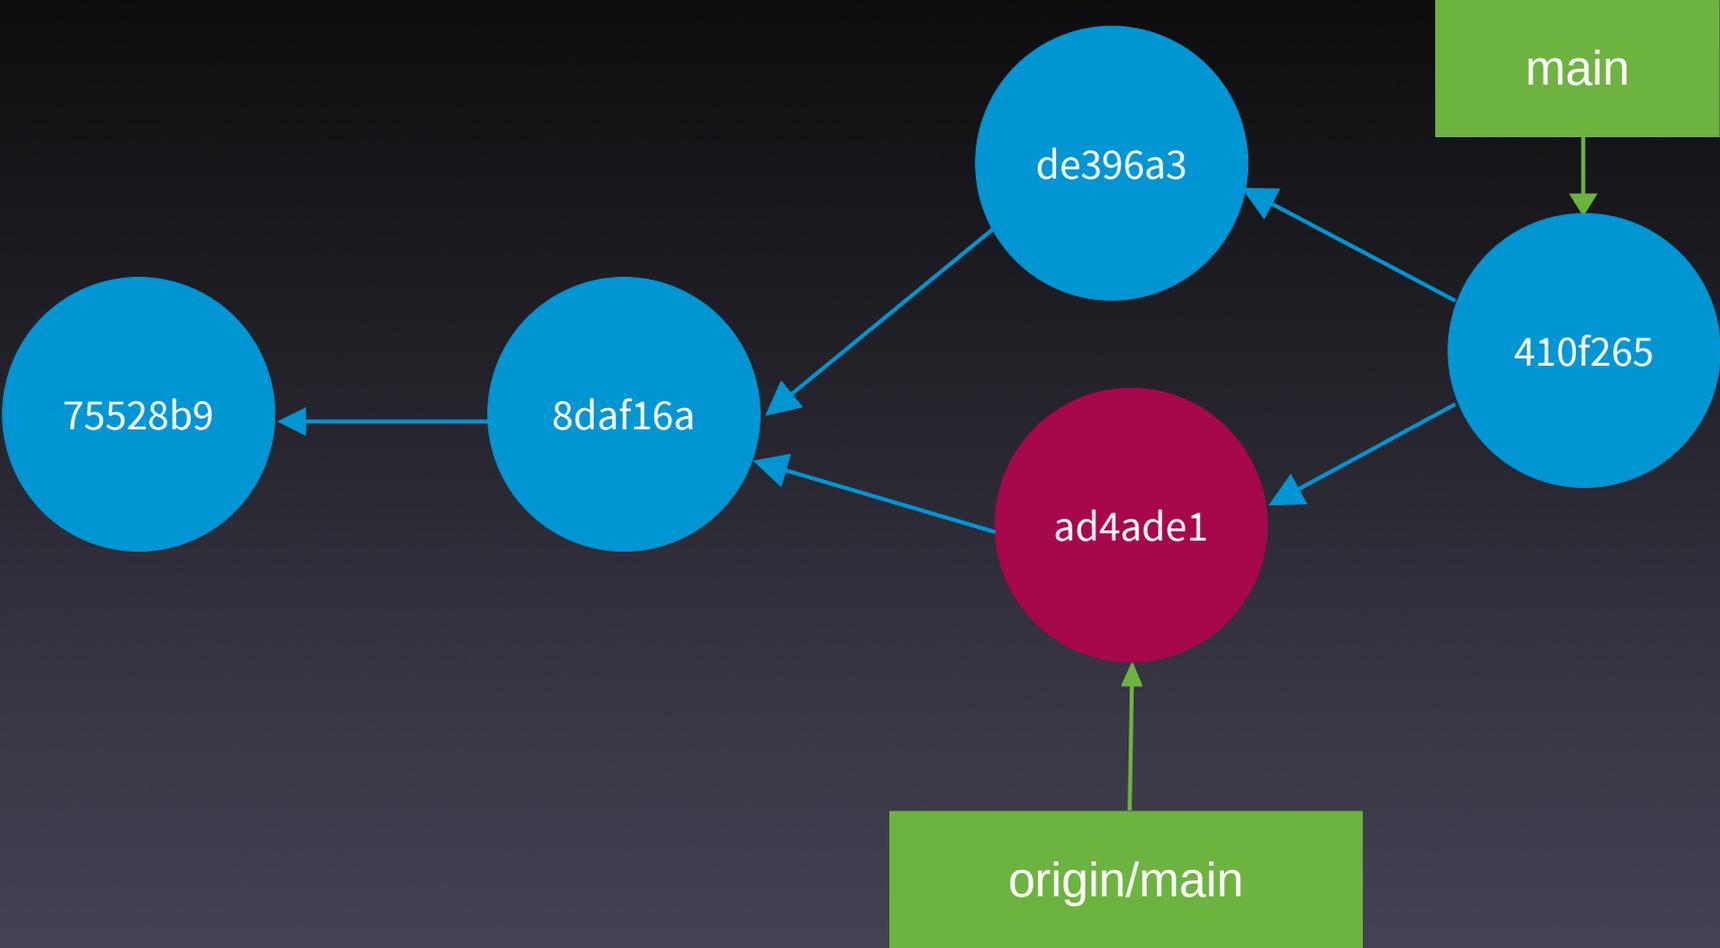


Centralizado (XII)

```
# Usuario 1
```

```
git reset --hard HEAD^1
```

```
git pull --rebase
```

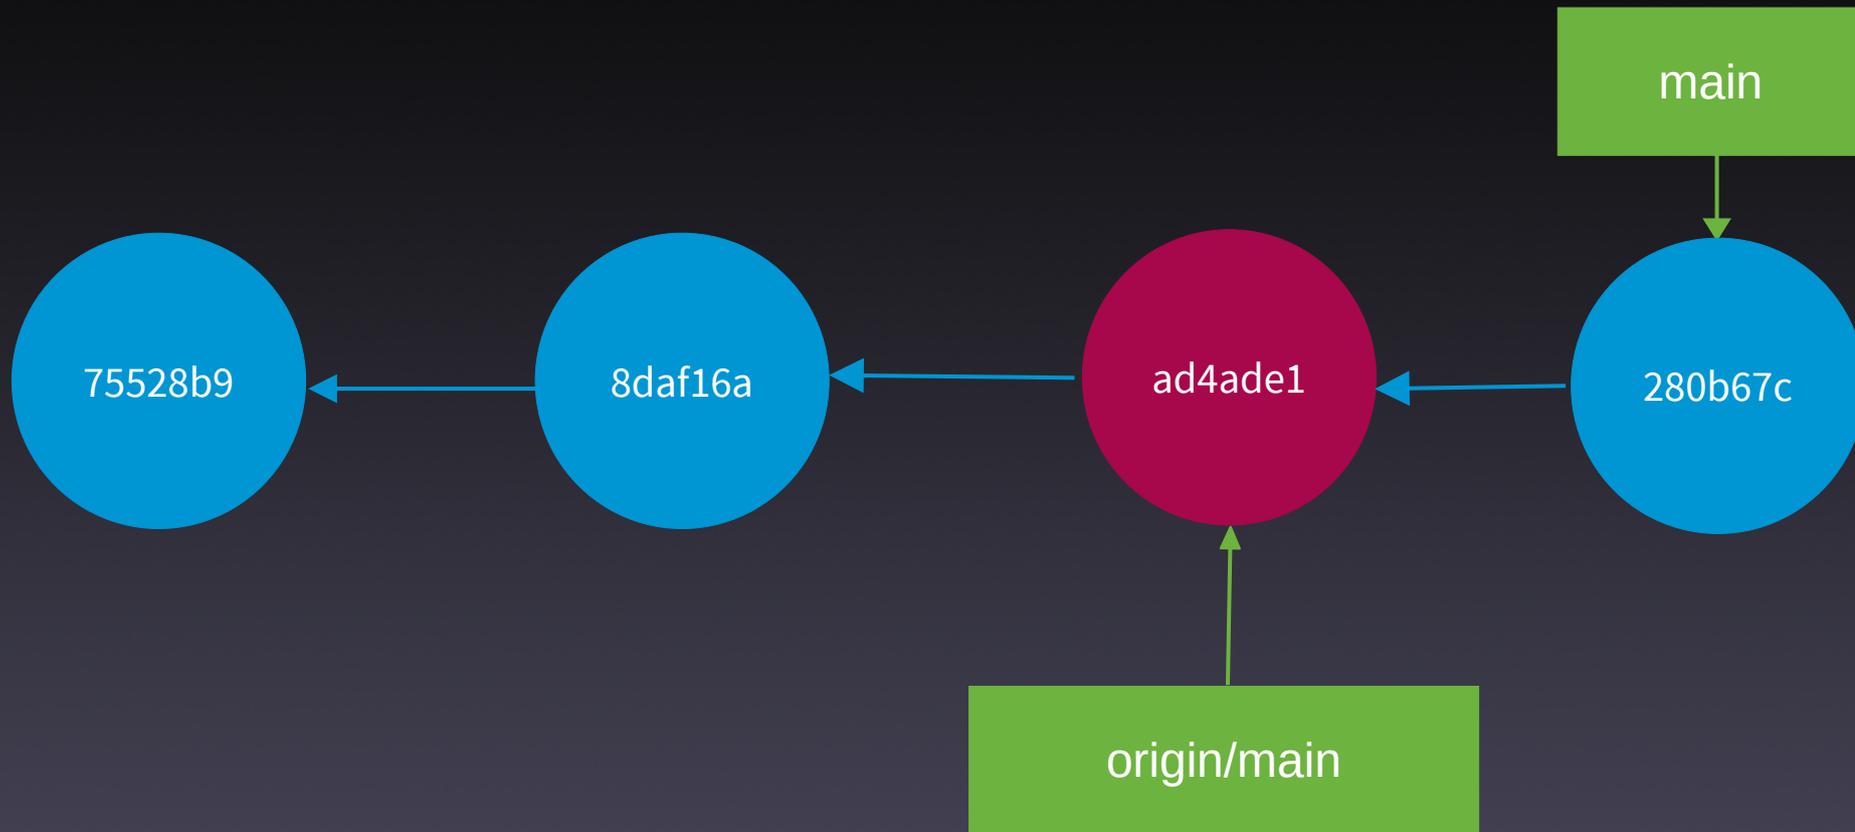

Ventajas

- Simple
- Adecuado para:
 - proyectos individuales o de equipos pequeños
 - Migraciones desde SVN u otros SCM centralizados

Inconvenientes

- Code reviews/PR complicadas
- Conflictos al colaborar
- No es el más adecuado para equipos medianos o grandes *

Ramas de funcionalidad

Feature branch

Características

- 1 servidor central para colaborar
- Todos los desarrolladores tienen acceso a ese servidor
- 1 rama para cada funcionalidad, incluyendo resolución de bugs
- Uso de PR y code review
- Integración en sistemas CI/CD

Feature branch

```
git init --bare /var/tmp/server/repo2.git
```

Feature branch (II)

```
# Usuario 1
cd /var/tmp/user1/
git clone /var/tmp/server/repo2.git
cd repo2
git config user.name "Noa"
git config user.email noa@example.com
touch archiv01.txt
git add .
git commit -m "Commit inicial"
```

A diagram illustrating a function call. At the top, a green rectangular box contains the text "main". A green arrow points downwards from the bottom center of this box to the top center of a blue circular node. Inside the blue circle, the hexadecimal address "75528b9" is written in white text.

main

75528b9

Feature branch (III)

```
# Usuario 1
```

```
git push
```

```
git checkout -b menu-movil
```

```
touch index.html
```


```
git add .
```

```
git commit -m "Añado el archivo index.html"
```

```
touch style.css
```

```
git add .
```

```
git commit -m "Añado el archivo style.css"
```

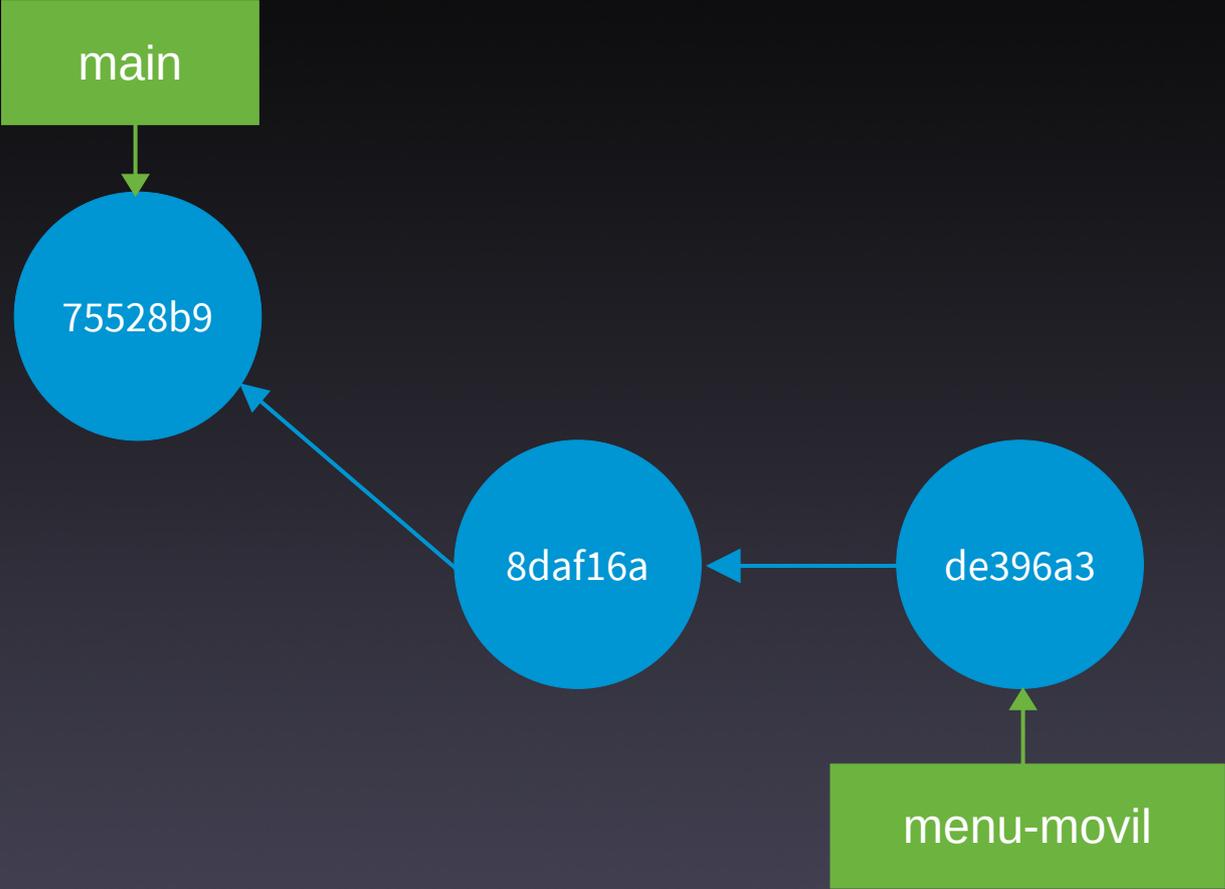

Feature branch (IV)

```
# Usuario 1
```

```
git push --set-upstream origin menu-movil
```

Experiment: Add OpenAI (ChatGPT) and DeepL support in the Translation Memory #134

Edit <> Code

Merged amieiro wants to merge 17 commits into WordPress:trunk from amieiro:openai-deepl

Conversation 17 Commits 17 Checks 0 Files changed 8

+607 -11



amieiro commented last month · edited by akirk

Member

What?

We are testing [ChatGPT](#) and [DeepL](#) as helpers to improve the translator's work.

ORIGINAL untranslated

Save your settings.

▼ Comment

Found in faq list item.

Enter translation here

Suggest

▼ Suggestions from Translation Memory

- 95% ¡Guarda tus ajustes!
Save your settings!
- OpenAI Guarda tus ajustes.
- DeepL Guarda la configuración.

▼ Other Languages

儲存設定。
Chinese (Taiwan) | By [Alex Lion](#)

Reviewers

akirk

trymebytes

Assignees

No one—assign yourself

Labels

None yet

Projects

None yet

Milestone

No milestone

Notifications

Customize

Unsubscribe

You're receiving notifications because you're watching this repository.

2 participants



Lock conversation

Allow edits by maintainers

Feature branch (V)

```
# Usuario 2  
cd /var/tmp/user2  
git clone /var/tmp/server/repo2.git  
cd repo2  
git switch menu-movil
```



akirk commented last month

Member ...

I've played around with it and it works great. Could we keep some stats? Maybe we can just store them in user meta? Specifically I think these will be interesting:

- Number of queries (= one per get-other-language-suggestions endpoint invocation)
- Number of tokens/characters used. [OpenAI reports](#) `['usage'] ['total_tokens']` in its response, for DeepL we need to count the [English UTF8 codepoints](#) (so `mb_strlen()`).
- Number of times the provider was used unmodified.
- Number of times the provider was used modified.

So we'd add stats to the endpoint and for saving the latter we'd need to extend GlotPress a little. Save in JS that a button was clicked and with what text and then when submitting the translation compare the text to the actual submission so that we can categorize it in the buckets.



amieiro added 7 commits last month

-  Move the select item for the language formality from the user preferenc... [...](#) Verified ab800b1
-  Remove a `error_log()` call Verified 0c04d62
-  Add support for variants and set the formal situation for DE and NL Verified 620367b
-  Add a counter for the OpenAI tokens and for the Deepl chars consumed ... [...](#) Verified 95fb69d
-  Remove the locale from the Deepl account URL Verified d01959d
-  Update some formality preferences Verified 3e3c7f0
-  Add the number of translations used and used without modifications fr... [...](#) Verified 1e8bed4



akirk requested changes 3 weeks ago

[View reviewed changes](#)


akirk left a comment

Member ...

Very nice! It almost works! The actually used translation is not reported for me, hence all my translations were recorded as "modified". Also a small number of inconsistencies. But otherwise, really great, also that their stats are transparently exposed to the user!


Feature branch (VI)

```
# Usuario 1
cd /var/tmp/user1/repo2
touch menu-movil.js
git add .
git commit -m "Añado el archivo menu-movil.js"
git push
```

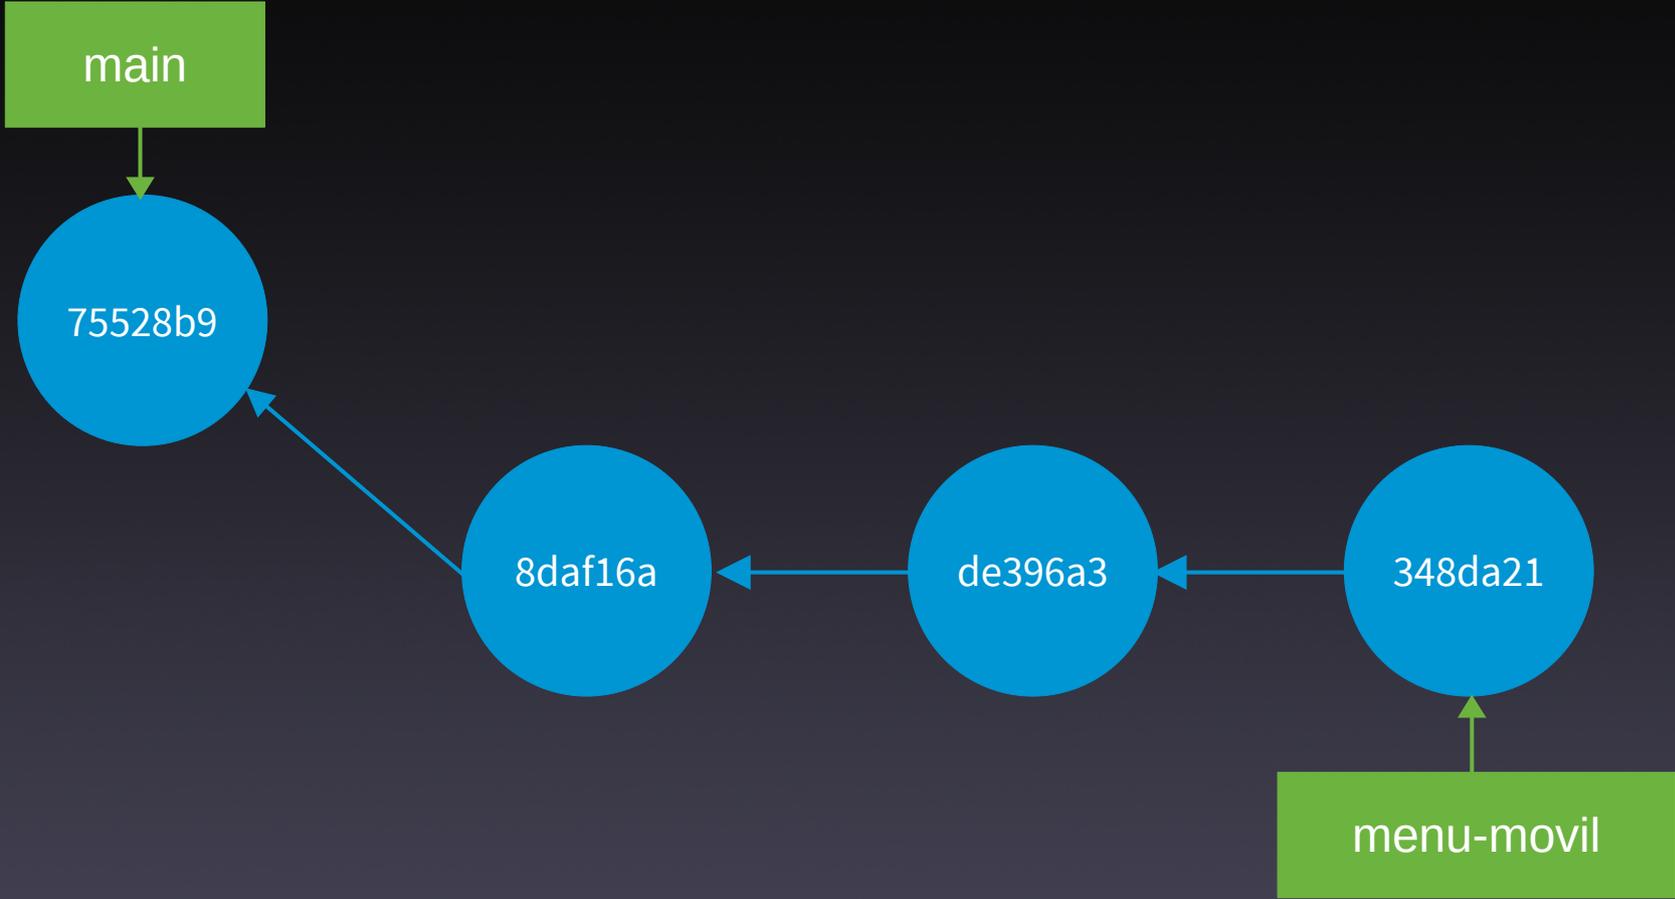

Feature branch (VII)


```
# Usuario 1  
git switch main  
echo "Línea 1 en el archivo1.txt" > archivo1.txt  
git commit -am "Línea 1 en el archivo1.txt"
```

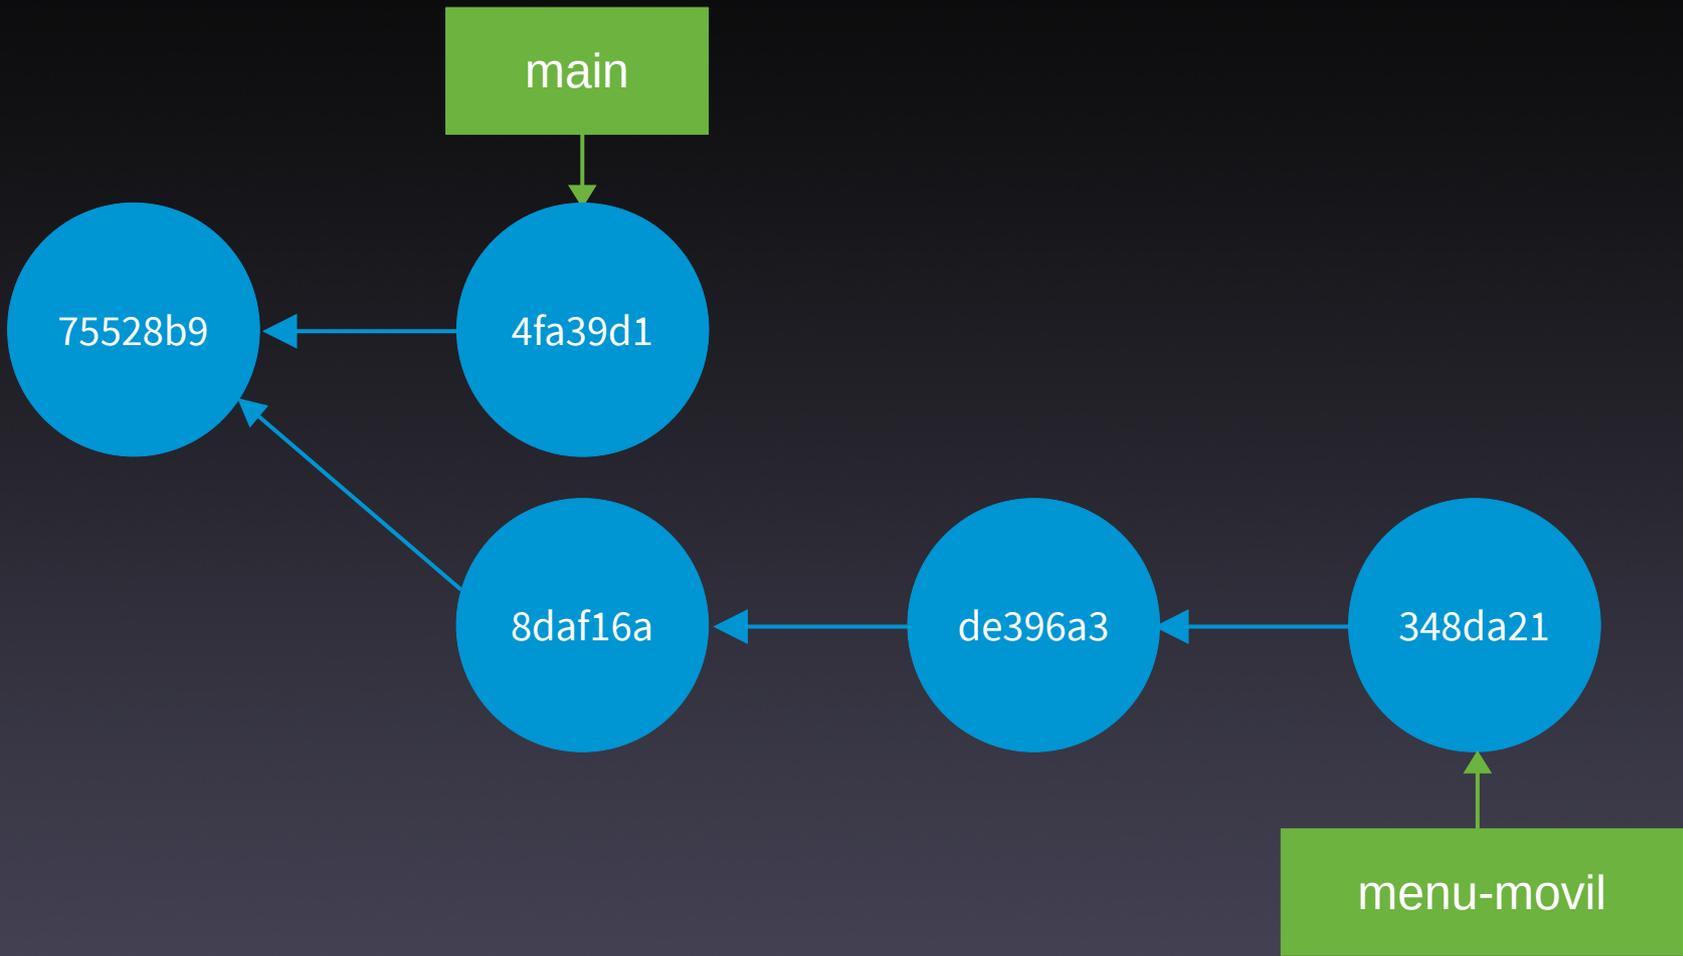

Feature branch (VIII)


```
# Usuario 1
```

```
git merge menu-movil
```

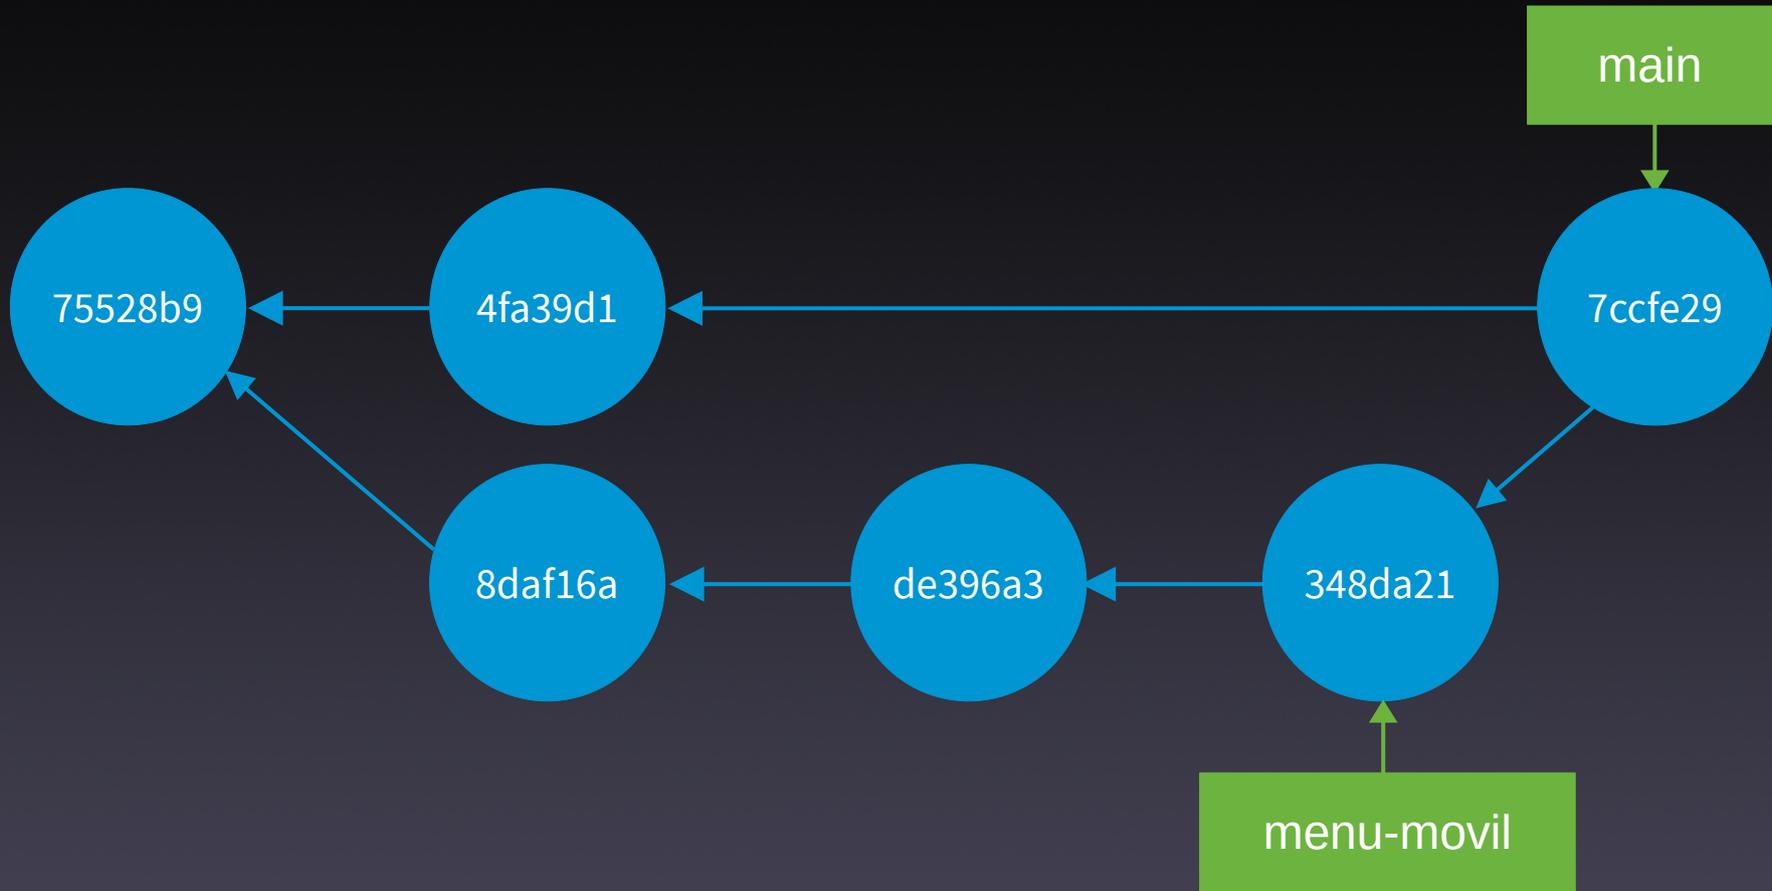

Feature branch (IX)

```
# Usuario 1  
git reset --hard HEAD^1  
gsw menu-movil  
git rebase main
```

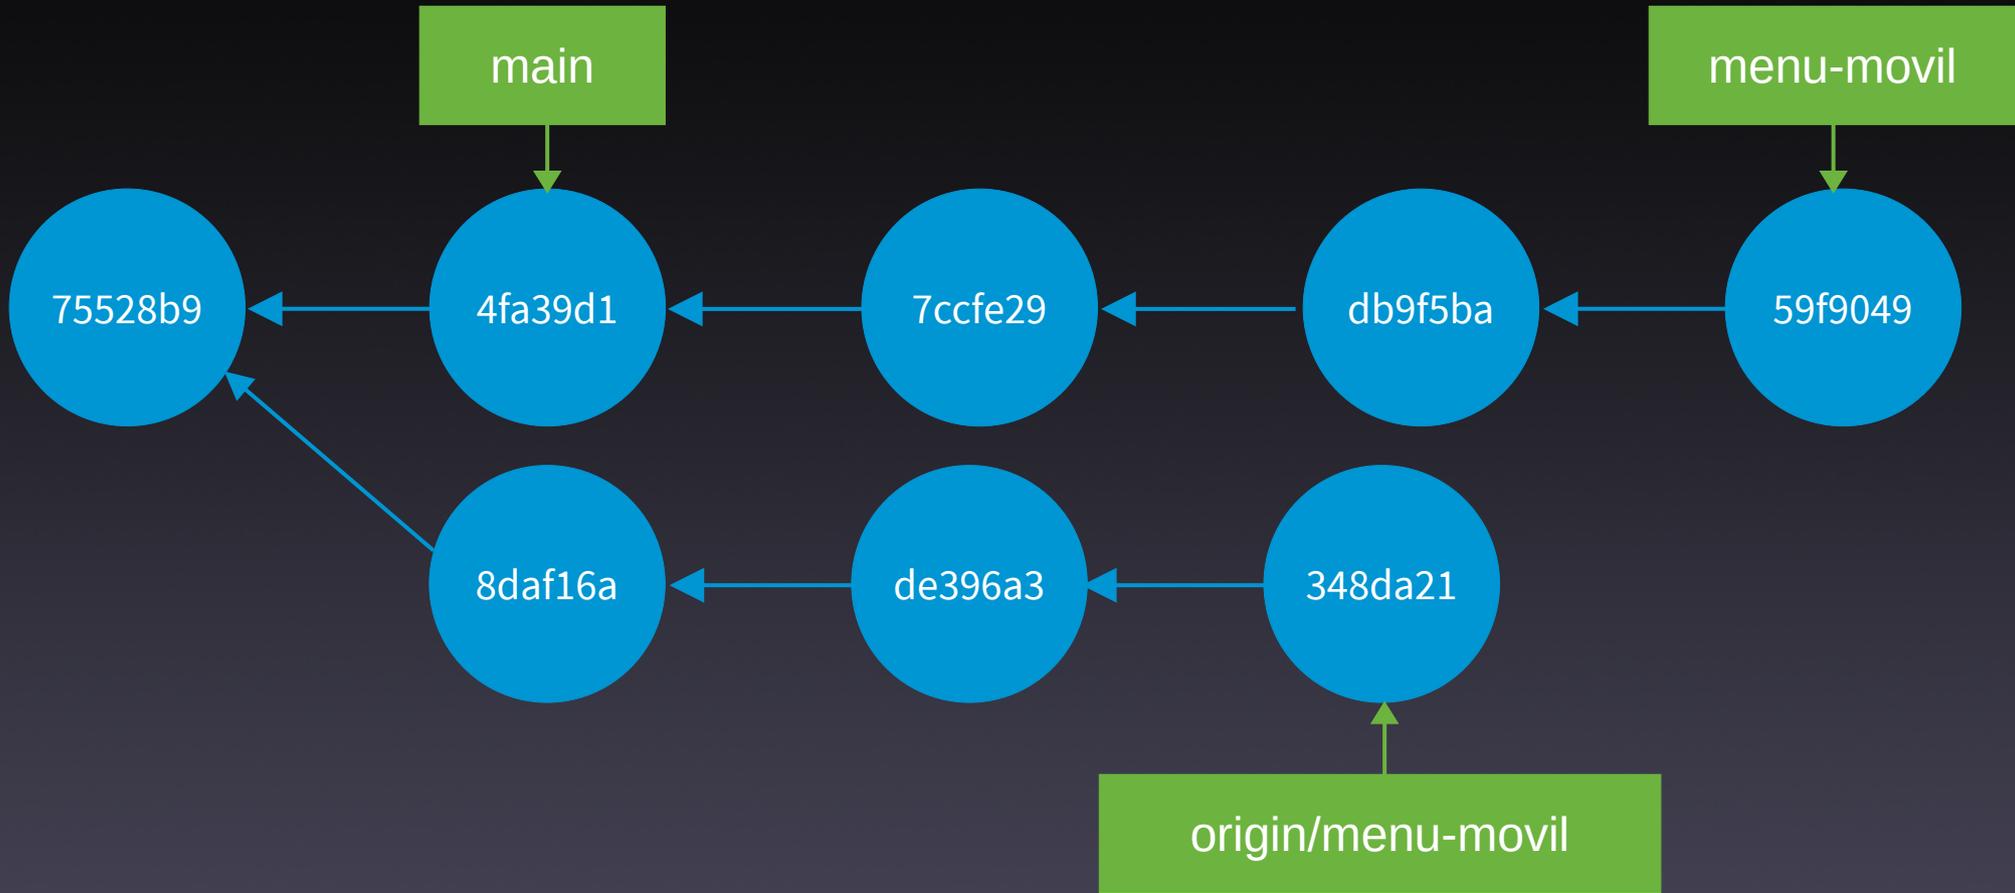

Feature branch (X)

```
# Usuario 1
```

```
# Parto de la situación previa al rebase anterior
```

```
git rebase -i main
```

```
pick ece162c Añado el archivo index.html
pick f0e335b Añado el archivo style.css
pick 93435e5 Añado el archivo menu-movil.js
```

```
# Rebase f45c302..93435e5 onto f45c302 (3 commands)
```

```
#
```

```
# Commands:
```

```
# p, pick <commit> = use commit
```

```
# r, reword <commit> = use commit, but edit the commit message
```

```
# e, edit <commit> = use commit, but stop for amending
```

```
# s, squash <commit> = use commit, but meld into previous commit
```

```
# f, fixup [-C | -c] <commit> = like "squash" but keep only the previous
#       commit's log message, unless -C is used, in which case
#       keep only this commit's message; -c is same as -C but
#       opens the editor
```

```
# x, exec <command> = run command (the rest of the line) using shell
```

```
# b, break = stop here (continue rebase later with 'git rebase --continue')
```

```
# d, drop <commit> = remove commit
```

```
# l, label <label> = label current HEAD with a name
```


```
# t, reset <label> = reset HEAD to a label
```

```
# m, merge [-C <commit> | -c <commit>] <label> [# <oneline>]
```

```
#       create a merge commit using the original merge commit's
#       message (or the oneline, if no original merge commit was
#       specified); use -c <commit> to reword the commit message
```


```
# u, update-ref <ref> = track a placeholder for the <ref> to be updated
#       to this position in the new commits. The <ref> is
```

```
reword ece162c Añado el archivo index.html
fixup f0e335b Añado el archivo style.css
fixup 93435e5 Añado el archivo menu-movil.js
```

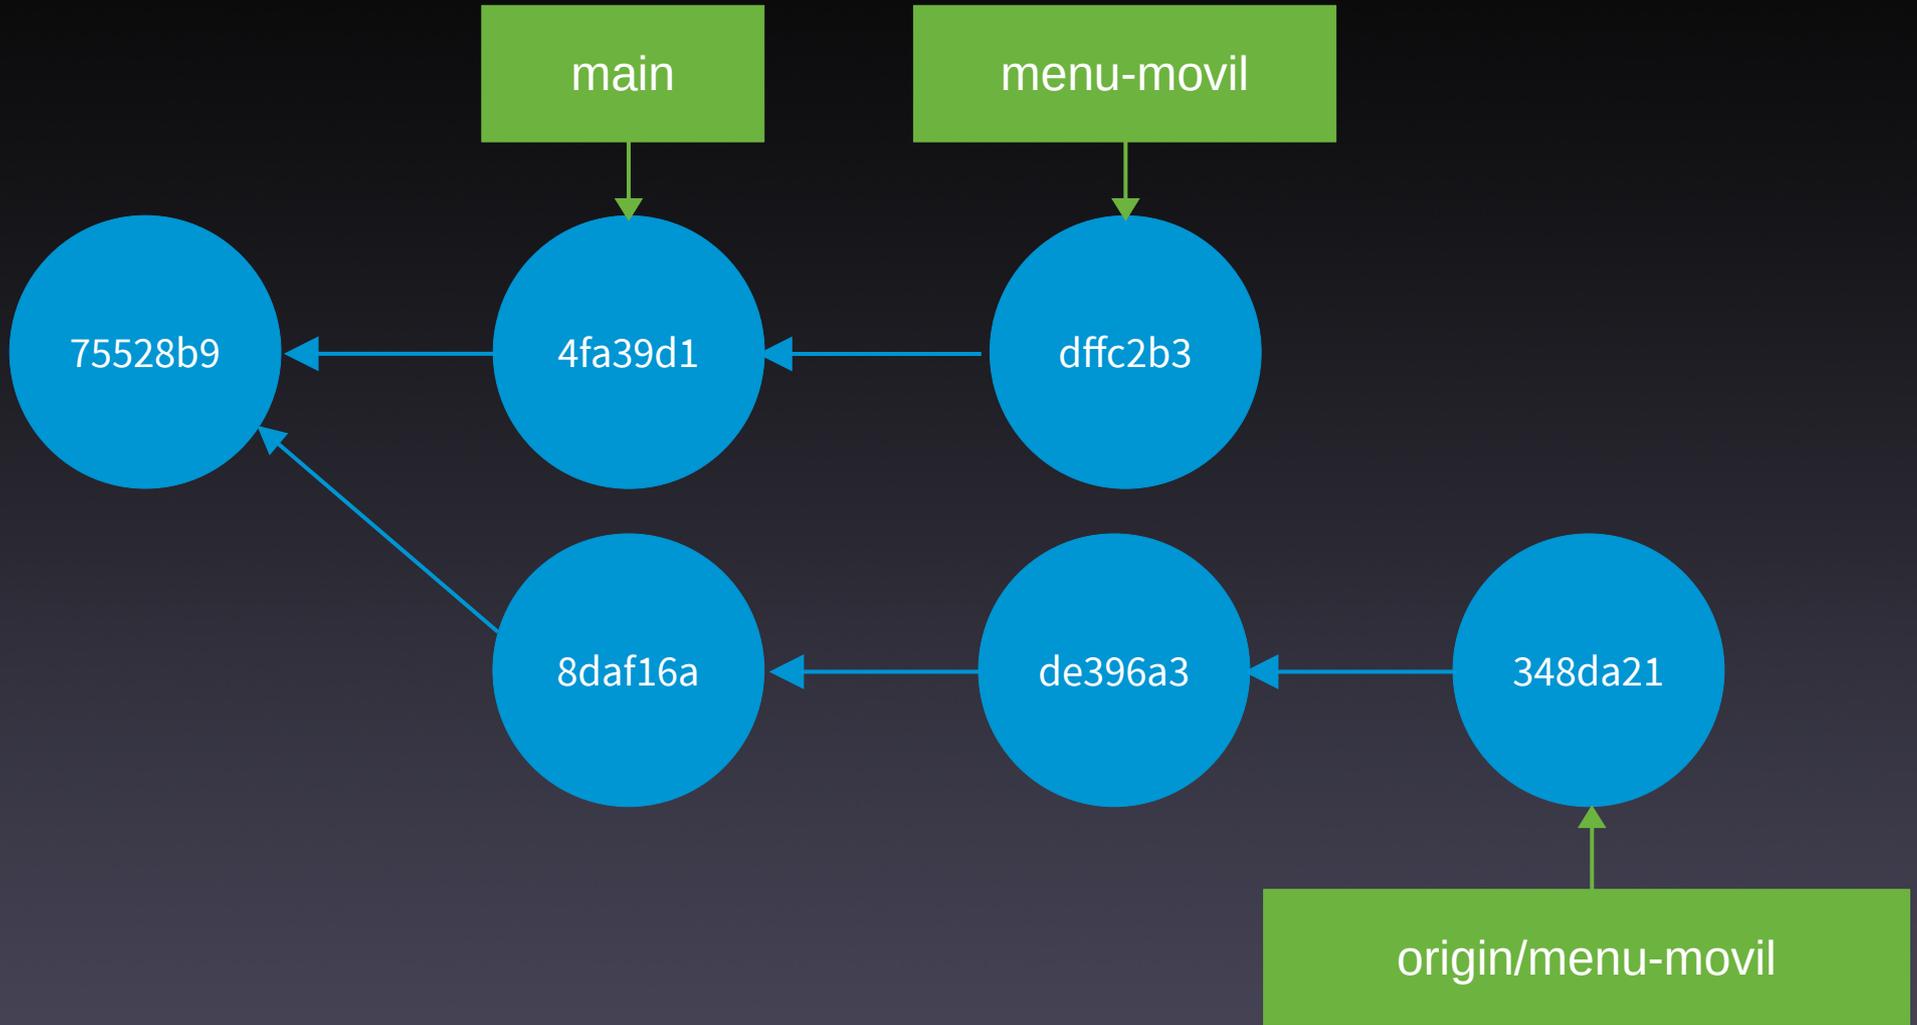

Feature branch (XI)

```
# Usuario 1
git switch main
git merge menu-movil
git branch -D menu-movil
git push origin --delete menu-movil
# Usuario 2
cd /var/tmp/user2/repo2
git switch main && git branch -D menu-movil
git remote prune origin
```

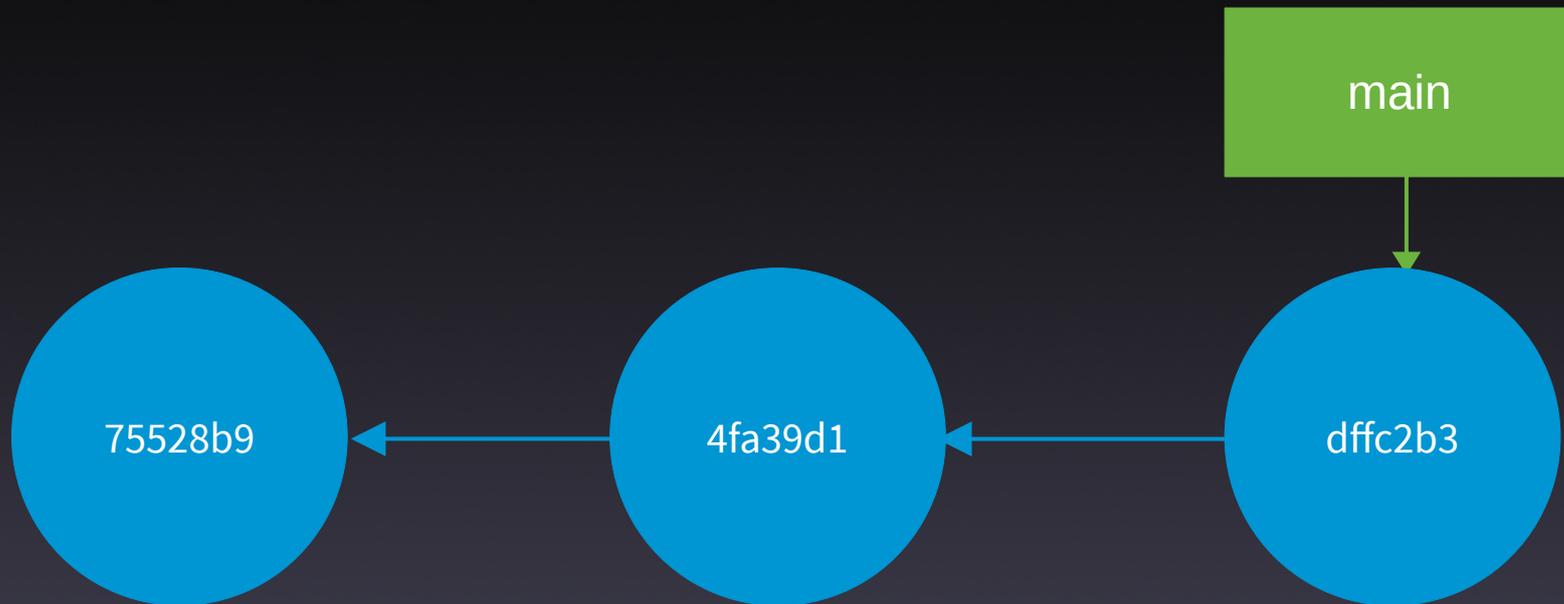

Ventajas

- Aislamiento con otras funcionalidades
→ colaboración simultánea
- Facilita:
 - las revisiones de código (PR)
 - integración en CI/CD
 - la experimentación sin interferencias
- Base para otros flujos de trabajo


Inconvenientes


- Incrementa la complejidad
- Problemas de fusión si varias personas trabajan en lo mismo
- Problemas de integración si la funcionalidad se alarga
- Tiempo de mantenimiento


Git flow


Características

- Roles para las diferentes ramas:
 - Persistentes:
 - main
 - develop
 - Tópicas:
 - feature
 - release
 - hotfix

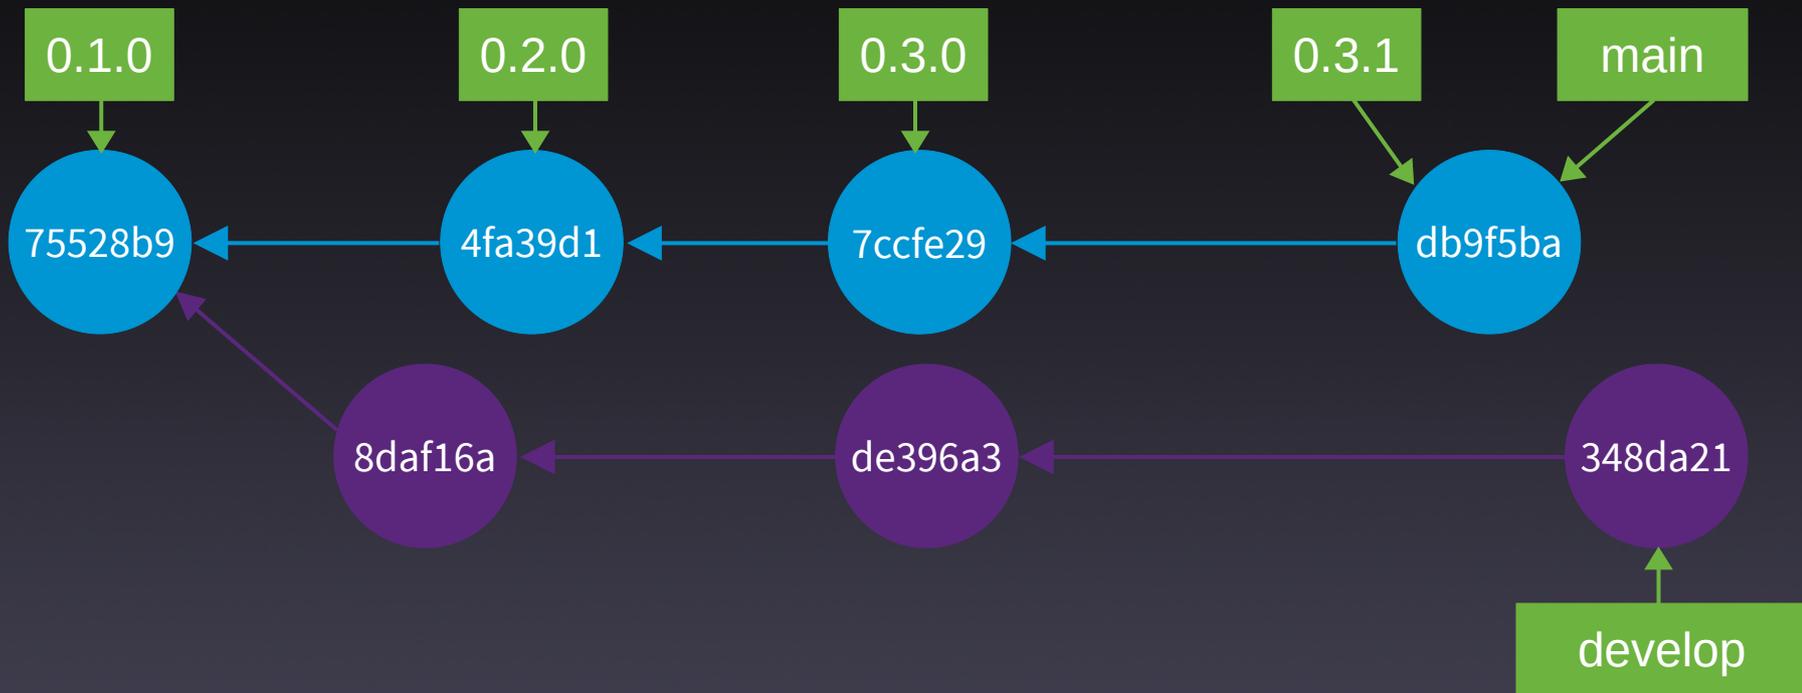

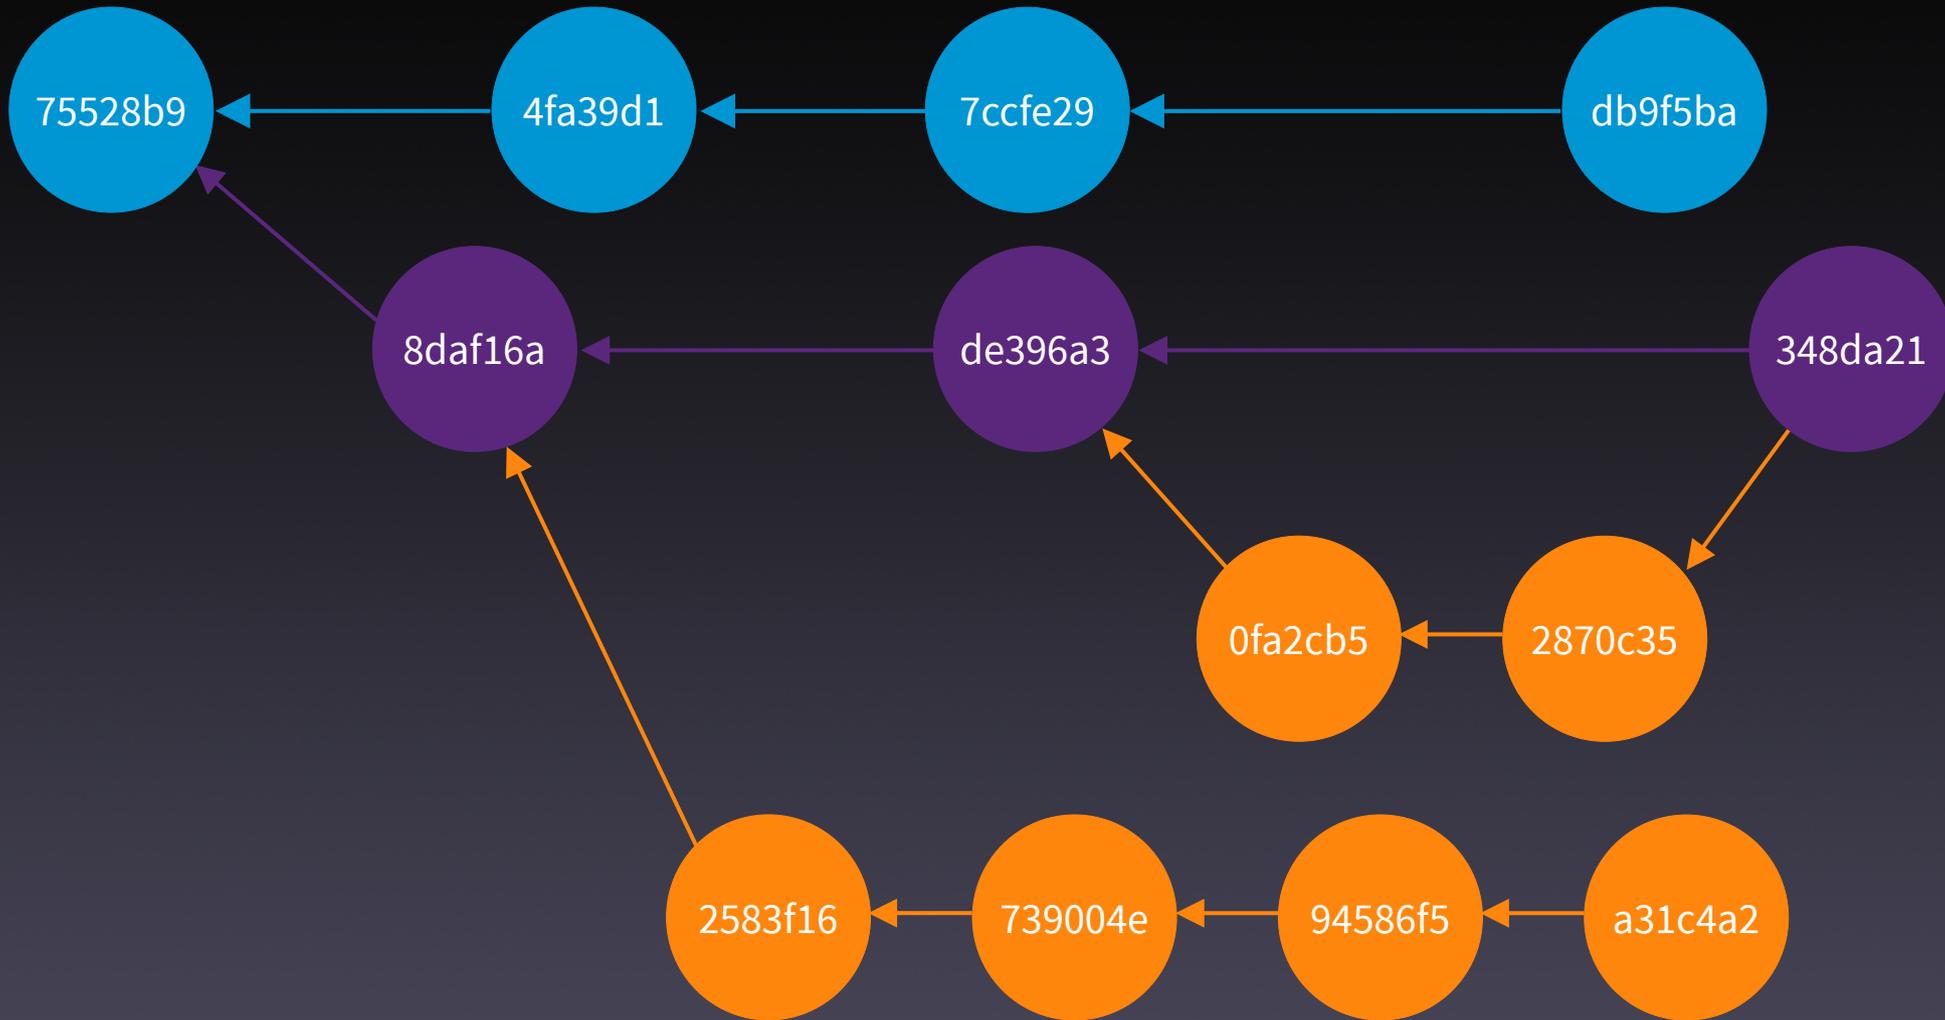

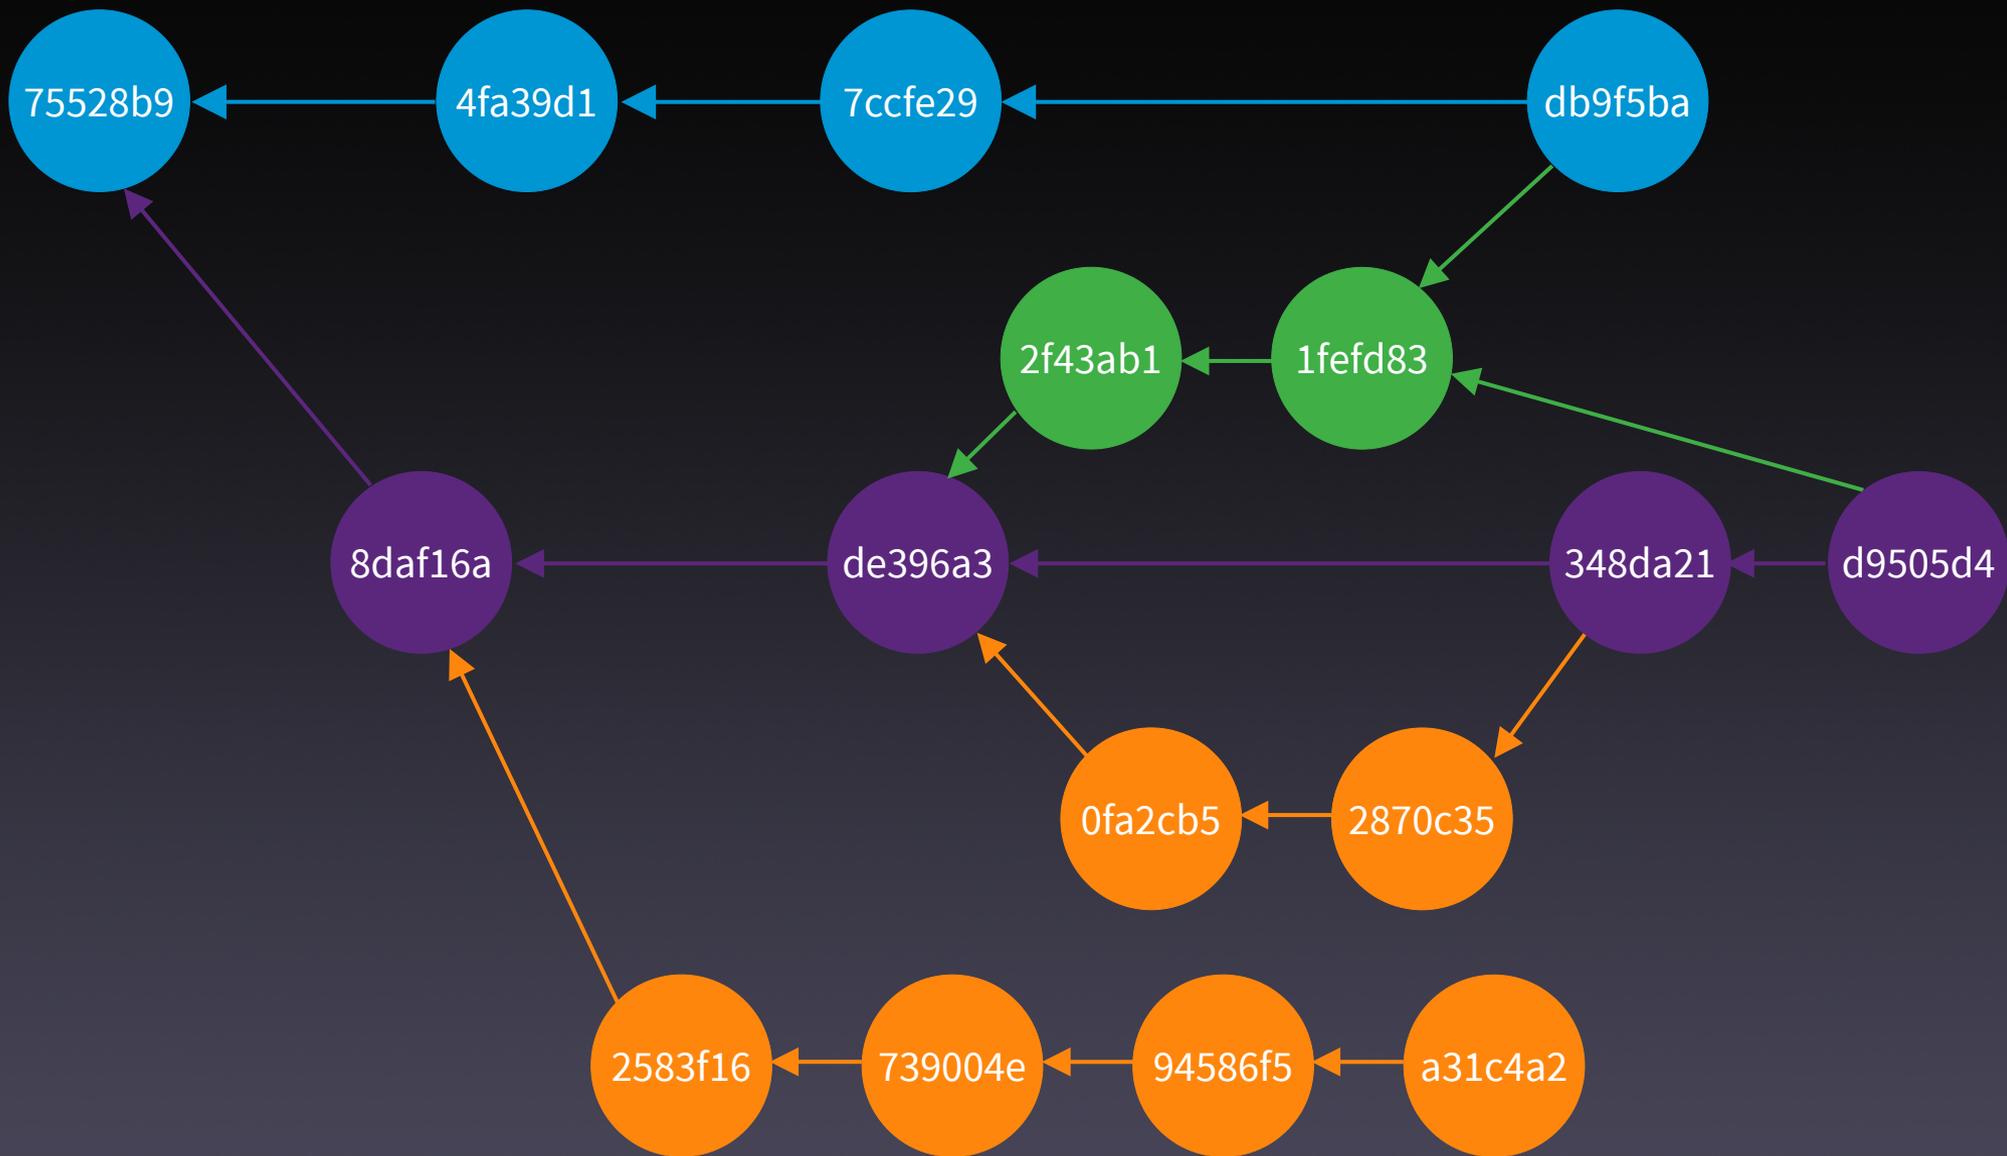

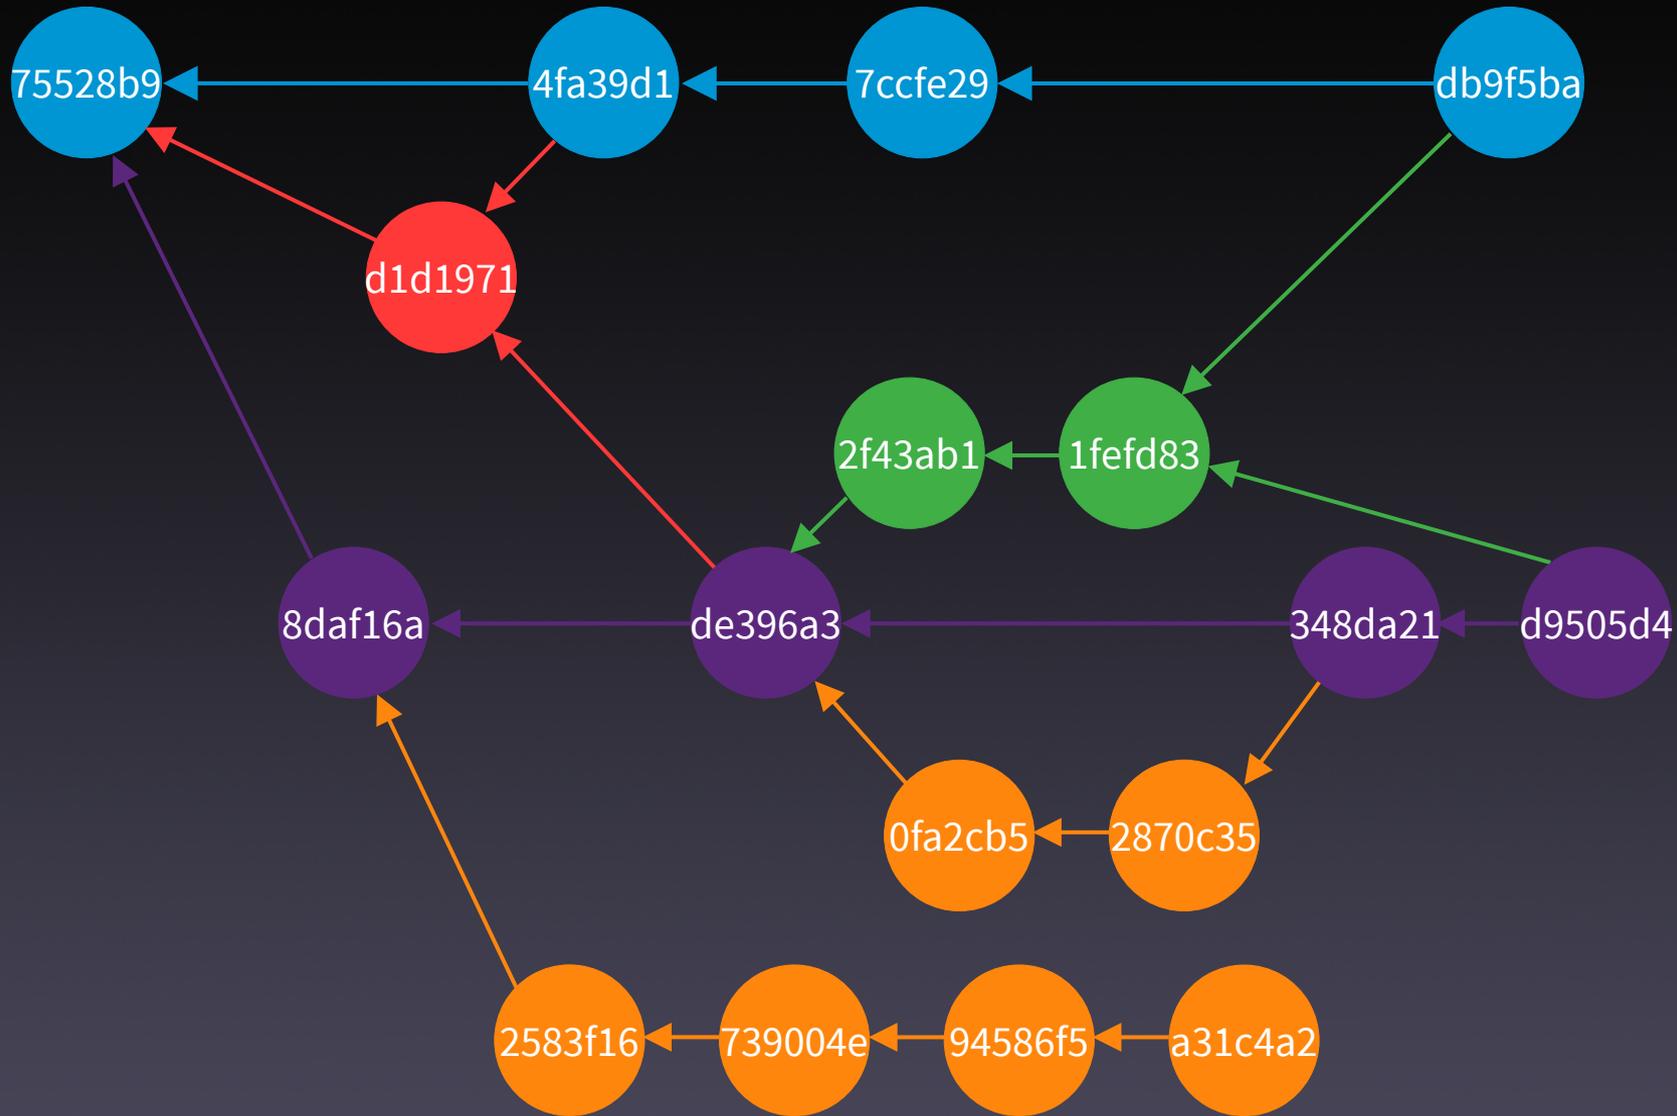

Git flow

```
# Usuario 1  
git init --bare /var/tmp/server/repo3.git  
brew install git-flow-avh  
cd /var/tmp/user1  
mkdir repo3  
cd repo3  
git flow init
```

```
Initialized empty Git repository in /private/var/tmp/user1/repo3/.git/  
No branches exist yet. Base branches must be created now.  
Branch name for production releases: [master] main  
Branch name for "next release" development: [develop]  
  
How to name your supporting branch prefixes?  
Feature branches? [feature/]  
Bugfix branches? [bugfix/]  
Release branches? [release/]  
Hotfix branches? [hotfix/]  
Support branches? [support/]  
Version tag prefix? []  
Hooks and filters directory? [/var/tmp/user1/repo3/.git/hooks]
```

Git flow (II)

```
# Usuario 1
```

```
git flow feature help
```

```
usage: git flow feature [list]
       or: git flow feature start
       or: git flow feature finish
       or: git flow feature publish
       or: git flow feature track
       or: git flow feature diff
       or: git flow feature rebase
       or: git flow feature checkout
       or: git flow feature pull
       or: git flow feature delete
```

Manage your feature branches.

For more specific help type the command followed by `--help`

Git flow (III)

```
# Usuario 1
git remote add origin /var/tmp/server/repo3.git
git push --set-upstream origin main
git flow feature start menu-movil
touch index.html
git add .
git commit -m "Añado el archivo index.html"
git flow feature publish
```

Git flow (IV)

```
# Usuario 2  
cd /var/tmp/user2  
git clone /var/tmp/server/repo3.git  
cd repo3  
git flow init  
git flow feature track menu-movil
```

Git flow (V)

```
# Usuario 1
cd /var/tmp/user1/repo3
touch style.css
git add .
git commit -m "Añado el archivo style.css"
git push
# Usuario 2
cd /var/tmp/user2/repo3
git pull
```

Git flow (VI)

```
# Usuario 1
```

```
cd /var/tmp/user1/repo3
```

```
git flow feature finish menu-movil
```




```
git push -u origin develop
```

Git flow (VII)

```
# Usuario 2  
cd /var/tmp/user2/repo3  
git switch develop  
git flow feature delete menu-movil -f  
git remote prune origin  
git pull --set-upstream origin develop
```

main

develop



Ventajas

- Estructura de ramas clara
- Separación de trabajos
- Gestión de las publicaciones estructurada

Inconvenientes

- Complejo
- «Sobrecarga» de trabajo vs. otros modelos
- Ciclos de publicación grandes → no válida para CD
- Falta de flexibilidad

Fork

Características

- Típico en proyectos de software libre
- Usa un modelo de ramas
- No integrado en git → soluciones externas (GitHub, GitLab, BitBucket,...)
- Repositorios en servidor:
 - 1 principal
 - 1 de cada desarrollador

Características

- Desarrollador hacen push en su repo
- Mantenedores lo hacen en el principal

Operativa

- Fork → clonado en el servidor
- Clonado local del fork
- Commit local y push al fork
- Creación de una PR → Discusión
- Más commits si es necesario
- Fusión de la PR en el proyecto principal

- H hunspell-gl**
- Project information
- Repository
- Issues 13
- Merge requests 1
- CI/CD
- Deployments
- Packages and registries
- Monitor
- Analytics
- Wiki
- Snippets

Proxecto Trasno > hunspell-gl

H hunspell-gl Free
 Project ID: 11916387

🔔 ☆ Star 2 🍴 Fork 2

🔗 2,981 Commits | 🌿 1 Branch | 🏷️ 3 Tags | 📦 13.1 MB Project Storage | 🚀 2 Releases

Topics: spellcheck hunspell spellchecker

Corrector ortográfico de galego

 **drag: +reutilizábel**
 Adrián Chaves authored 2 days ago 77b8b7ef

master | hunspell-gl / + | Find file | Web IDE | Download | Clone

- README
- GNU GPLv3
- CHANGELOG

Name	Last commit	Last update
doc	Update licensing and changelog file names to be m...	4 years ago
scripts	Python 2 → Python 3	1 week ago
src	drag: +reutilizábel	2 days ago
tests	Ordinais, sistema de probas, e outros cambios	8 years ago
utils	Progreso na automatización para o DRAG	2 days ago
.gitignore	Initial implementation of rag/gl/correcto.dic autom...	3 years ago



Search or jump to...



[Pull requests](#) [Issues](#) [Codespaces](#) [Marketplace](#) [Explore](#)



ameiro / GlotPress Public

forked from [GlotPress/GlotPress](#)

Watch 0 Fork 124 Star 0

Fork your own copy of ameiro/GlotPress

[Code](#) [Pull requests](#) [Actions](#) [Projects](#) [Security](#) [Insights](#)

develop

34 branches 31 tags

Go to file

Add file

Code

This branch is up to date with [GlotPress/GlotPress:develop](#).



pedro-mendonca and **ameiro** 1368: Add I18n to JavaScript ([GlotPress#1368](#)) 3e555bc 9 hours ago 3,004 commits

.github	Bump ramsey/composer-install from 1 to 2 (GlotPress#1529)	last week
.wordpress-org	Add workflows to automate deployment to WordPress.org plugin dire...	last year
assets	1368: Add I18n to JavaScript (GlotPress#1369)	9 hours ago
bin	Remove unused readme.template and release.ini	last year
gp-includes	1368: Add I18n to JavaScript (GlotPress#1369)	9 hours ago
gp-templates	Highlight leading and trailing spaces, and double/multiple spaces in ...	9 hours ago
locales	Locales: Add Tarifit locale (GlotPress#1477)	4 months ago
tests/phpunit	Highlight leading and trailing spaces, and double/multiple spaces in ...	9 hours ago
.editorconfig	Update wp-dev-lib to latest version (GlotPress#1065)	3 years ago
.eslintignore	Add JavaScript linting (GlotPress#1281)	2 years ago
.eslintrc.json	Add characters and words counts to editor (GlotPress#1478)	6 months ago

About

GlotPress is a WordPress plugin to let you set up your own collaborative, web-based software translation tool.

wordpress.org/plugins/glotpress/

Readme

GPL-2.0 license

0 stars

0 watching

124 forks

Report repository

Releases

31 tags

Packages

No packages published



Search or jump to...

Pull requests Issues Codespaces Marketplace Explore



amieirotest01 / GlotPress Public

forked from amieiro/GlotPress

Pin Watch 0 Fork 125 Star 0

Code Pull requests Actions Projects Wiki Security Insights Settings

develop 1 branch 0 tags Go to file Add file Code

This branch is up to date with amieiro/GlotPress:develop. Contribute Sync fork

pedro-mendonca and amieiro 1368: Add l18n to JavaScript (GlotPress#1369) 3e55bc 9 hours ago 3,004 commits

.github	Bump ramsey/composer-install from 1 to 2 (GlotPress#1529)	last week
.wordpress-org	Add workflows to automate deployment to WordPress.org plugin dire...	last year
assets	1368: Add l18n to JavaScript (GlotPress#1369)	9 hours ago
bin	Remove unused readme.template and release.ini	last year
gp-includes	1368: Add l18n to JavaScript (GlotPress#1369)	9 hours ago
gp-templates	Highlight leading and trailing spaces, and double/multiple spaces in ...	9 hours ago
locales	Locales: Add Tarifit locale (GlotPress#1477)	4 months ago
tests/phpunit	Highlight leading and trailing spaces, and double/multiple spaces in ...	9 hours ago
.editorconfig	Update wp-dev-lib to latest version (GlotPress#1065)	3 years ago
.eslintignore	Add JavaScript linting (GlotPress#1281)	2 years ago

About

GlotPress is a WordPress plugin to let you set up your own collaborative, web-based software translation tool.

wordpress.org/plugins/glotpress/

- Readme
- GPL-2.0 license
- 0 stars
- 0 watching
- 125 forks

Releases

No releases published Create a new release

Packages

Fork

```
# Usuario 1
cd /var/tmp/user1
git clone
https://github.com/amieirotest01/GlotPress.git
cd GlotPress
git checkout -b testing-branch
echo "This is a test" > CONTRIBUTING.md
git add .
git commit -m "This is a test"
```

Fork (II)

```
# Usuario 1
```

```
git push --set-upstream origin testing-branch
```

```
Username for 'https://github.com': amieirotest01
Password for 'https://amieirotest01@github.com':
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 8 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 1004 bytes | 1004.00 KiB/s, done.
Total 3 (delta 2), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
remote:
remote: Create a pull request for 'testing-branch' on GitHub by visiting:
remote:   https://github.com/amieirotest01/GlotPress/pull/new/testing-branch
remote:
To https://github.com/amieirotest01/GlotPress.git
 * [new branch]      testing-branch -> testing-branch
branch 'testing-branch' set up to track 'origin/testing-branch'.
```



Search or jump to...

Pull requests Issues Codespaces Marketplace Explore



ameiro / GlotPress Public

Watch 0

Fork 125

Star 0

forked from GlotPress/GlotPress

Code Pull requests Actions Projects Security Insights

Open a pull request

Create a new pull request by comparing changes across two branches. If you need to, you can also [compare across forks](#).

base repository: ameiro/GlotPress base: develop head repository: ameirotest01/GlotPress compare: testing-branch


✓ Able to merge. These branches can be automatically merged.



This is a test

Write

Preview



```

<!-- Thanks for contributing to GlotPress! Please, follow the GlotPress Contributing Guidelines:
https://github.com/GlotPress/GlotPress/blob/develop/CONTRIBUTING.md -->

## What?
<!-- In a few words, what is the PR actually doing? -->

## Why?
<!-- Why is this PR necessary? What problem is it solving? What new functionality is it adding? Reference any existing
previous issue(s) or PR(s), but please add a short summary here, too -->

## How?
<!-- How is your PR addressing the issue at hand? What are the implementation details? -->

## Testing Instructions
<!-- Please include step-by-step instructions on how to test this PR. -->
<!-- 1. Open a original string in a project. -->
<!-- 2. Add the translation. -->
<!-- 3 etc -->

```

Attach files by dragging & dropping, selecting or pasting them.

Allow edits by maintainers

Create pull request



PR test in a GitHub fork

Write Preview

What?

This is a PR test in a GlotPress fork.

Why?

Because I am talking about Git workflows at [Commit Conf 2023](#).

How?

Testing Instructions

Screenshots or screencast

The screenshot shows a GitHub pull request interface. At the top, it says "Open a pull request" and "Create a new pull request by comparing changes across two branches. If you need to, you can also compare across forks." Below this, there are two branches selected: "base: develop" and "head repository: ameirotest01:testing-branch". A green arrow indicates "Add to merge". The main content is a diff view showing commit messages for a pull request. The messages are:

- <!-- Thanks for contributing to GlotPress! Please, follow the GlotPress Contributing Guidelines: https://github.com/GlotPress/GlotPress/blob/develop/CONTRIBUTING.md -->
- ## What? <!-- In a few words, what is the PR actually doing? -->
- ## Why? <!-- Why is this PR necessary? What problem is it solving? What new functionality is it adding? Reference any existing previous issues or PRs, but please add a short summary here. -->
- ## How? <!-- How is your PR addressing the issue at hand? What are the implementation details? -->
- ## Testing instructions <!-- Please include step-by-step instructions on how to test this PR. -->
 - <!-- 1. Clone or original string in a project. -->
 - <!-- 2. Add the translation. -->

 At the bottom of the diff view, there is a checkbox for "Allow edits by maintainers" and a green "Create pull request" button.

Allow edits by maintainers ?

Create pull request



Search or jump to...

Pull requests Issues Codespaces Marketplace Explore



amieiro / GlotPress Public

forked from GlotPress/GlotPress

Unpin

Watch 0

Fork 125

Star 0

Code Pull requests 1 Actions Projects Wiki Security Insights Settings

PR test in a GitHub fork #2

Edit <> Code

Open amieirotest01 wants to merge 1 commit into amieiro:develop from amieirotest01:testing-branch

Conversation 0 Commits 1 Checks 0 Files changed 1

+1 -0

Changes from all commits File filter Conversations Jump to

0 / 1 files viewed

Review changes

CONTRIBUTING.md

<> Viewed

```

@@ -111,3 +111,4 @@ These should be enough for us to move forward.
111 111 ## Finally...
112 112
113 113 Thanks! Working on GlotPress should be fun! If you find any of this hard to figure out, let us know so we can improve our process or documentation! You can also find us in the [GlotPress channel on the WordPress Slack] (https://wordpress.slack.com/messages/glotpress/). If you don't have access to it yet, [you can sign up for Slack access](https://make.wordpress.org/chat/).
114 + Añado una línea de prueba.

```

Write Preview H B I ≡ <> @ ↻ ↶ ↷

`` suggestion
Añado una línea de prueba, pero un poco más larga.
``



Attach files by dragging & dropping, selecting or pasting them.

Cancel Add single comment Start a review



© 2023 GitHub, Inc.

Terms Privacy Security Status Docs Contact GitHub Pricing API Training Blog About



Search or jump to...

Pull requests Issues Codespaces Marketplace Explore



amieiro / GlotPress Public

forked from GlotPress/GlotPress

Unpin

Watch 0

Fork 125

Star 0

Code Pull requests 1 Actions Projects Wiki Security Insights Settings

PR test in a GitHub fork #2

Edit <> Code

Open amieirotest01 wants to merge 1 commit into amieiro:develop from amieirotest01:testing-branch

Conversation 0 Commits 1 Checks 0 Files changed 1

+1 -0

Changes from all commits File filter Conversations Jump to

0 / 1 files viewed

Review changes

CONTRIBUTING.md

<> Viewed

```

@@ -111,3 +111,4 @@ These should be enough for us to move forward.
111 111  ## Finally...
112 112
113 113  Thanks! Working on GlotPress should be fun! If you find any of this hard to figure out, let us know so we can improve our process or documentation! You can also find us in the [GlotPress channel on the WordPress Slack] (https://wordpress.slack.com/messages/glotpress/). If you don't have access to it yet, [you can sign up for Slack access](https://make.wordpress.org/chat/).
114 + Añado una línea de prueba.

```

Write Preview

Suggested change

- 114 - Añado una línea de prueba.
- 114 + Añado una línea de prueba, pero un poco más larga.

Cancel Add single comment Start a review



© 2023 GitHub, Inc.

Terms Privacy Security Status Docs Contact GitHub Pricing API Training Blog About



Search or jump to...

Pull requests Issues Codespaces Marketplace Explore



amieiro / GlotPress Public

Unpin

Watch 0

Fork 125

Star 0

forked from GlotPress/GlotPress

Code Pull requests 1 Actions Projects Wiki Security Insights Settings

PR test in a GitHub fork #2

Edit <> Code

Open amieirotest01 wants to merge 1 commit into amieiro:develop from amieirotest01:testing-branch

Conversation 0 Commits 1 Checks 0 Files changed 1

+1 -0

Changes from all commits File filter Conversations Jump to

0 / 1 files viewed

Review changes

CONTRIBUTING.md

<> Viewed

```

@@ -111,3 +111,4 @@ These should be enough for us to move forward.
111 111  ## Finally...
112 112
113 113  Thanks! Working on GlotPress should be fun! If you find any of this hard to figure out, let us know so we can improve our process or documentation! You can also find us in the [GlotPress channel on the WordPress Slack]
      114  (https://wordpress.slack.com/messages/glotpress/). If you don't have access to it yet, [you can sign up for Slack access](https://make.wordpress.org/chat/).
114  + Añado una línea de prueba.

```

amieiro now Owner

Suggested change

114 - Añado una línea de prueba.

114 + Añado una línea de prueba, pero un poco más larga.

Commit suggestion Add suggestion to batch

Reply...

Resolve conversation

Commit suggestion

Update CONTRIBUTING.md

Add an optional extended description...

Commit changes

Open

PR test in a GitHub fork #2

amieirotest01 wants to merge 2 commits into amieiro:develop from amieirotest01:testing-branch

```
<<- Why is this PR necessary? What problem is it solving? What new functionality is it adding? Reference any existing
(previous issues) or PRs, but please add a short summary here, too -->

## Issue
<<- How is your PR addressing the issue at hand? What are the implementation details? -->

## Testing instructions
<<- Please include step-by-step instructions on how to test this PR -->
<<- 1. Open a original string in a project -->
<<- 2. Add the translation -->
<<- 3. ... -->

Attach files by dragging & dropping, selecting or pasting them.
```

Create pull request

Lock conversation

This is a test

Verified

4049fe7

amieiro reviewed 1 minute ago

View reviewed changes

CONTRIBUTING.md Outdated

Show resolved

Update CONTRIBUTING.md

Verified

08e7ee1

Add more commits by pushing to the testing-branch branch on amieirotest01/GlotPress.



Continuous integration has not been set up

GitHub Actions and several other apps can be used to automatically catch bugs and enforce style.



This branch has no conflicts with the base branch

Merging can be performed automatically.

Merge pull request

You can also open this in GitHub Desktop or view command line instructions.



Write

Preview

H B I

Leave a comment

Attach files by dragging & dropping, selecting or pasting them.

Merged

PR test in a GitHub fork #2

amieiro merged 2 commits into `amieiro:develop` from `amieirotest01:testing-branch` now

```
<-- Please include step-by-step instructions on how to test this PR -->
<-- 1. Open a terminal window in a project -->
<-- 2. Add the translation -->
<-- 3. etc -->
Always file to dragging & dropping, selecting or pasting them.
Allow edits by maintainers
Create pull request
```

This is a test Verified 4049fe7



amieiro reviewed 4 minutes ago [View reviewed changes](#)

CONTRIBUTING.md Outdated [Show resolved](#)

Update CONTRIBUTING.md Verified 08e7ee1

amieiro merged commit 972aaf2 into `amieiro:develop` now [Revert](#)



Write

Preview

H B I

Leave a comment

Attach files by dragging & dropping, selecting or pasting them.

Comment

Remember, contributions to this repository should follow its [contributing guidelines](#).

ProTip! Add `.patch` or `.diff` to the end of URLs for Git's plaintext views.

Ventajas

- Facilita:
 - colaboración
 - Code review
 - CI/CD
- Buena seguridad: \neq repos

Inconvenientes

- Fragmentación del código
- Problemas de coordinación y comunicación
- Introducción de problemas de seguridad

Otros flujos de trabajo

Otros flujos

- GitHub flow
- GitLab flow
- Release Flow
- OneFlow
- Trunk-based development

Conclusiones

- No hay una solución válida para todos
- Empieza por la más sencilla
- Reduce el tipo de ramas
- Experimenta y háblalo con tu equipo



jesus@jesusamieiro.com

